

Next Level

# event lighting

CHAUVET DJ tools for Big Occasion Power

# see

Vivid 4 is a modular video panel that vividly displays content without the need of bulky media servers. Create dazzling video displays with these lightweight video panels that feature Black body LEDs that accurately reproduce high-contrast videos. Vivid 4 makes a perfect DJ façade and seamlessly integrates with Serato for displaying music videos to add gig excitement.

# video panels



## Vivid 4

**Light Source:** 21,632 SMD 2,828 LEDs (tri-color RGB) 0.3 W, (60 mA), 50,000 hours life expectancy

**Wavelength:** 620 to 625 nm red, 516 to 530 nm green, 460 to 475 nm blue

**Viewing Angle:** 120°

**Maximum Illuminance:** 1,200 NITS

**Calibrated Illuminance:** 1,000 NITS

**Contrast Ratio:** 4,300:1

**Refresh Rate:** 1,920 Hz

**Pixel Density:** 43,264 m<sup>2</sup> (104 x 208)

**Pixel Pitch:** 4.8 mm

**Minimum Viewing Distance:** 4 m

**Control Protocol:** Novastar

**Power I/O Connectors:** Seetronic® powerKON®

**Signal I/O Connectors:** Seetronic® etherKON®

**Power Linking:** 7 units @ 120 V; 13 units @ 230 V

**Input Voltage:** 100 to 240 VAC, 50/60 Hz

(auto-ranging)

**Power and Current:** 280 W, 2.3 A @ 120 V, 60 Hz

**Power and Current:** 280 W, 1.2 A @ 230 V, 50 Hz

**Weight:** 12.5 kg

**Size:** 500 x 65 x 1000 mm

**Maximum Vertical Hang:** 23 panels

**Maximum Horizontal Hang:** 17 panels

**Required Controllers:** Vivid Drive 23N

**Optional Mounting Brackets:** RB-F50CM, RB-F100CM

**Approvals:** CE, MET

## Vivid Drive 23N

**Control Protocol:** Novastar

**Control Input Connectors:** RS-232, USB

**Video Input Connectors:** BNC, VGA, HDMI

(w/ loop out)

**Video Output Connector:** HDMI, DVI, RJ45 (x2)

**Max. Supported LEDs:** 1,310,720

**Max. Supported Panels (Vivid 4):** 30 per RJ45

**Included Rackmount:** 1U

**Input Voltage:** 100 to 240 VAC, 50/60 Hz

(auto-ranging)

**Power and Current:** 40 W, 0.4 A @ 120 V, 60 Hz

**Power and Current:** 40 W, 0.2 A @ 230 V, 50 Hz

**Weight:** 1.4 kg

**Size (w/o rackmount):** 219 x 250 x 45 mm

**Approvals:** CE

# move



The CHAUVET DJ line of Intimidator moving head fixtures is a powerful lighting addition to any large scale event production. Depending on which fixture is in your arsenal, a dynamic combination of bright LEDs, gobo and prism effects, zoom capability and more are at your service to bring your large scale events to life.

# movingheads



## Intimidator Spot 375Z IRC

**DMX Channels:** 9 or 15  
**Light Source:** 1 LED (white) 150 W, (12.3 A), 50,000 hours  
**Zoom Angle (motorized):** 10° to 23°  
**Gobos:** 7 + open (6 aluminum + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds  
**Gobo Size:** 24 mm outside, 20 mm image, 1 mm max thickness  
**Colors:** 7 + white, split colors, continuous scroll at variable speeds  
**Illuminance (10°):** 38,000 lux @ 2 m  
**Illuminance (23°):** 19,850 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 12.4 kg  
**Size:** 220 x 322 x 466 mm



## Intimidator Trio

**DMX Channels:** 15 or 30  
**Light Source:** 6 LEDs (quad-color RGBW) 21 W (6.3 A), 50,000 hours  
**Zoom Angle (motorized):** 7° to 53°  
**Illuminance (7°):** 16,000 lux @ 2 m  
**Illuminance (53°):** 1,350 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 9.2 kg  
**Size:** 278 x 278 x 386 mm



## Intimidator Spot 355 IRC

**DMX Channels:** 8 or 14DMX  
**Light Source:** 1 LED (white) 90 W (24.2 A), 50,000 hours life expectancy  
**Zoom Angle:** (manual): 12° to 17°  
**Gobos:** 7 + open (5 metal + 2 glass), rotating, interchangeable, continuous scroll at variable speeds  
**Gobo Size:** 24 mm outside, 20 mm image, 1.1 mm max thickness  
**Colors:** 8 + white, split colors, continuous scroll at variable speeds  
**Illuminance:** (12°): 21,810 lux @ 2 m  
(17°): 9,400 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 11.2 kg  
**Size:** 268 x 340 x 392 mm

# move



# movingheads



## Intimidator Wash Zoom 450

**DMX Channels:** 14, or 29  
**Light Source:** 12 LEDs (quad-color RGBW)  
15 W (3.7 A), 50,000 hours  
**Illuminance:** (14°): 25,610 lux @ 2 m  
(58°): 1,960 lux @ 2 m  
**Illuminance:** (50°): 998 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 7.2 kg  
**Size:** 194 x 277 x 363 mm



## Intimidator Beam 355 IRC

**DMX Channels:** 8 or 14  
**Light Source:** 1 LED (white) 100 W, (27 A),  
50,000 hours  
**Colors:** 8 + white, split colors, continuous scroll at  
variable speeds  
**Gobo wheel:** 5 + open, animation effect, continuous  
scroll at variable speeds  
**Illuminance:** 262,800 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 11.6 kg  
**Size:** 322 x 220 x 480 mm



## Intimidator Beam 140SR

**DMX Channels:** 8 or 14  
**Light Source (included):** Osram Sirius HRI 140W  
discharge lamp, 6,000 hours  
**Beam Angle (beam):** 3°  
**Beam Angle (frost):** 21°  
**Gobos:** 17 + open (all Aluminum), Fixed, continu-  
ous scroll at variable speeds  
**Colors:** 14 + white, split colors, continuous scroll  
at variable speeds  
**Illuminance:** 382,000 lux @ 5 m  
**Illuminance:** 37,900 lux @ 15 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 11.7 kg  
**Size:** 322 x 220 x 420 mm



## Intimidator Hybrid 140SR

**DMX Channels:** 13 or 19  
**Light Source (included):** Osram Sirius HRI 140 W  
discharge lamp, 6,000 hours  
**Zoom Angle Motorized (beam):** 3° to 11° (spot): 7°  
to 21° (wash): 14° to 28°  
**Gobo wheel (1):** 9 + open, rotating, interchangeable,  
slot-n-lock, continuous scroll at variable speeds  
**Gobo wheel (2):** 17 + open, metal, continuous scroll  
at variable speeds  
**Colors:** 12 + white, split colors, continuous scroll at  
variable speeds  
**Illuminance (3° beam):** 382,000 lux @ 5 m  
**Illuminance (7° spot):** 104,700 lux @ 5 m  
**Illuminance (14° wash):** 4,680 lux @ 5 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 15.2 kg  
**Size:** 322 x 220 x 513 mm

# Wash

A vibrant concert scene with performers on stage and a cheering crowd. The word 'Wash' is overlaid in large, semi-transparent letters. The stage is lit with warm, rich colors, and the crowd is seen from behind, with many people raising their hands in the air. The background features a large graphic with the word 'LOW' and other stylized text.

CHAUVET DJ SlimPAR Pro and COLORband Pix M USB wash lights provide a bright, powerful punch for maximum event lighting impact and can wash any stage or event space with warm, rich and vibrant colors. With the addition of D-Fi USB compatibility, these fixtures are equipped with wireless DMX capability taking creative lighting flexibility to new heights.



# washlights



## SlimPAR Pro H USB

**DMX Channels:** 6, 7 or 12  
**Light Source:** 12 LEDs (hex-color RGBAW+UV)  
10 W (2.4 A), 50,000 hours  
**Beam Angle:** 24°  
**Illuminance:** 3,218 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 3.3 kg  
**Size:** 253 x 98 x 290 mm



## SlimPAR Pro Q USB

**DMX Channels:** 4, 5 or 10  
**Light Source:** 12 LEDs (quad-color RGBA) 6 W  
(2 A), 50,000 hours  
**Beam Angle:** 16°  
**Illuminance:** 5,690 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 3.3 kg  
**Size:** 253 x 98 x 290 mm



## SlimPAR Pro W USB

**DMX Channels:** 3, 4 or 9  
**Light Source:** 12 LEDs (tri-color CW, WW, A) 6 W  
(1.4 A), 50,000 hours  
**Color Temperature Range:** 1700 to 6300 K  
**Beam Angle:** 17°  
**Illuminance:** 3,097 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 3.2 kg  
**Size:** 253 x 98 x 290 mm

wasn



# washlights



245° Rotating LED Strip Light



## COLORband PiX-M USB

**DMX Channels:** 5, 6, 8, 10, 17, 32 or 36

**Tilt:** 245°

**Light Source:** 10 LEDs (tri-color RGB) 9 W, (2A), 50,000 hours

**Beam Angle:** 20°

**Illuminance:** 6,120 lux @ 2 m

**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)

**Weight:** 4.4 kg

**Size:** 785 x 67 x 123 mm

## SlimPAR Pro QZ12 USB

**DMX Channels:** 5, 6 or 11

**Light Source:** 12 LEDs (quad-color RGBA) 10 W (2.7 A), 50,000 hours

**Zoom Angle (beam to field):** 10° to 50°

**Illuminance (10°):** 16,070 lux @ 2 m

**Illuminance (50°):** 1,216 lux @ 2 m

**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)

**Weight:** 4.6 kg

**Size:** 234 x 269 x 318 mm

# spot





# spotlights



## LED Followspot 120ST

**DMX Channels:** 3  
**Light Source:** 1 LED (cool white) 120 W (30.6A), 50,000 hours  
**Zoom Angle:** (manual): 14° to 20°  
**Illuminance:** (14°): 16,060 lux @ 2 m  
**Illuminance:** (20°): 7,900 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 7.5 kg  
**Size:** 582 x 279 x 341 mm



Uses glass gobos to create incredible gobo or pattern details.



## EVE E-100Z

**DMX Channels:** 1 or 3  
**Light Source:** 1 LED (warm white) 100 W (2.3 A), 50,000 hours  
**Color Temperature:** 3500 K  
**Gobo Size:** M 66 mm outside, 48 mm image, 2 mm max thickness  
**Zoom Angle (manual):** 14° to 30°  
**Illuminance (14°):** 15,100 lux @ 2 m  
**Illuminance (30°):** 3,800 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 5.7 kg  
**Size:** 611 x 183 x 430 mm

# naze



CHAUVET DJ has a variety of haze machines, fog machines and atmospheric effects with a full array of powerful production features to meet any event effect needs.

# haze & fog machines

## Atmospheric Fluids



**HF5**

High Performance Haze Fluid



**QDF5**

Quick Dissipating Fluid



**FF5**

High Performance Fog Fluid




## Hurricane Haze 4D

**DMX Channels:** 2  
**Tank Capacity:** 3.75 L  
**Input Voltage:** 120 VAC, 60 Hz or 230 VAC, 50 Hz  
**Output:** 4,300 cfm  
**Weight:** 6 kg  
**Size:** 277 x 396 x 245 mm



## Hurricane 1600

**DMX Channels:** 1  
**Tank Capacity:** 2.4 L  
**Input Voltage:** 120 VAC, 60 Hz or 230 V, 50 Hz  
**Output:** 25,000 cfm  
**Weight:** 6 kg  
**Size:** 348 x 312 x 253 mm

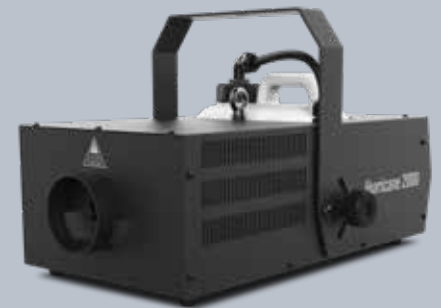

## Hurricane 2000

**DMX Channels:** 1  
**Tank Capacity:** 3 L  
**Input Voltage:** 120 VAC, 60 Hz or 230 V, 50 Hz  
**Output:** 25,000 cfm  
**Weight:** 6.2 kg  
**Size:** 487 x 297 x 236 mm

# Fog



Create a white fog that hugs the floor and dissipates without rising or blast a dynamic and safe pyrotechnic-like effect without the use of any toxic chemicals.



# haze & fog machines



## Nimbus

**Tank Capacity:** 17 L  
**Heat-up time:** (single element): 50 min  
**Heat-up time:** (dual element): 30 min  
**Reheat time:** (single element): 30 min  
**Reheat time:** (dual element): 15 min  
**Average runtime:** 6 min  
**Input Voltage:** 120 VAC, 60 Hz or 230 VAC, 50 Hz  
**Dry ice capacity:** 4.5 kg  
**Weight (full):** 34 kg  
**Size:** 513 x 465 x 470 mm



Wireless Remote Included

## Geyser P7

**DMX Channels:** 15  
**Output:** 17,000 cfm  
**Light Source:** 7 LEDs (penta-color RGBA+UV)  
9W (3 A), 50,000 hours  
**Tank Capacity:** 2.5 L  
**Input Voltage:** 120 VAC, 60 Hz or 230 VAC, 50 Hz  
**Weight:** 8.5 kg  
**Size:** 400 x 362 x 210 mm



## Cumulus

**DMX Channels:** 2  
**Fog Fluid Tank Capacity:** 3.25 L  
**Tank Capacity:** 7.6 L  
**Heat-up time:** 3 min  
**Input Voltage:** 120 VAC, 60 Hz or 230 VAC, 50 Hz  
**Weight:** 26.7 kg  
**Size:** 2625 x 409 x 453 mm

# freedom

The background of the image consists of numerous vertical lines of light. Each line is composed of small, bright LED lights that create a sense of motion and depth. The colors of the lights are primarily blue, red, and purple, with some white and yellow lights interspersed. The overall effect is a vibrant, dynamic, and futuristic light display.

CHAUVET DJ's battery powered Freedom series fixtures are 100% wireless and can operate with its built in D-Fi transceiver technology. Bright, dynamic light with a variety of LED color combinations for unlimited color mixing anywhere you need it.

# battery powered



Available in a 4 Pack,  
Includes Carry Bag  
Multicharger and  
IRC-6 Remote



FC

## Freedom Stick Pack

**DMX Channels:** 3, 8, 48 or 50  
**Light Source:** 32 SMD LEDs (tri-color RGB) 0.2 W (50 mA), 50,000 hours  
**Coverage Angle:** 360°  
**Maximum Run Time:** (all on): up to 8 hours  
**Weight:** 7.5 kg  
**Size:** 1535 x 65 x 220 mm



FC

## Freedom Par Hex-4

**DMX Channels:** 6, 8, or 12  
**Light Source:** 4 LEDs (hex-color RGBAW+UV) 10 W (2 A), 50,000 hours  
**Beam Angle:** 23°  
**Maximum Run Time:** (all on): up to 8 hours  
**Illuminance:** 1,372 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 2.9 kg  
**Size:** 138 x 145 x 184 mm



FC

## Freedom Par Quad-4 IP

**DMX Channels:** 4, 6 or 10  
**Light Source:** 4 LEDs (quad-color RGBA) 5 W (2 A), 50,000 hours  
**Beam Angle:** 15°  
**Maximum Run Time:** (all on): up to 8 hours  
**Illuminance:** 2,464 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 3.6 kg  
**Size:** 145 x 138 x 191 mm



FC

## Freedom H1

**DMX Channels:** 6, 8 or 12  
**Light Source:** 1 LED (hex-color RGBAW+UV) 10W, (3 A), 50,000 hours  
**Beam Angle:** 21°  
**Maximum Run Time:** up to 8 hours  
**Illuminance (w/ filter):** 268 lux @ 2 m  
**Illuminance (w/o filter):** 314 lux @ 2 m  
**Input Voltage:** 8.4 VDC, 1.35 A (external power supply: 100-240 VAC, 50/60 Hz)  
**Weight:** 0.7 kg  
**Size:** 97 x 75 x 139 mm

# Outdoor

A photograph of an outdoor patio area at night, illuminated by various string lights. The scene features a wooden fence in the background, a stone walkway, and several large, glowing spherical light fixtures hanging from the ceiling. The lighting is a mix of warm white, blue, and red, creating a vibrant and inviting atmosphere.

CHAUVET DJ IP-rated fixtures are built rugged to withstand the elements and deliver powerful outdoor lighting options rain or shine.

# outdoor fixtures



## Festoon

**DMX Channels:** 3, 8, 9, 60, 120 or 180  
**Light Source:** 6 SMD LED's (tri-color RGB) (50 mA) per bulb, 50,000 hours  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**IP Rating:** IP43  
**Weight:** (Controller): 4.8 kg  
**Size:** (String): 15000 x 60 x 133 mm (Controller): 190 x 213 x 48.7 mm



Charge multiple units with the Freedom Flex H4 IP X6

## Freedom Flex H4 IP

**DMX Channels:** 6, 8 or 12  
**Light Source:** 4 LEDs (hex-color RGBAW + UV) 10 W, (2 A), 50,000 hours  
**Beam Angle:** 14°  
**Illuminance:** 2163 lux @ 2 m  
**IP Rating:** IP54  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 8.8 lb (1.4 kg)  
**Size:** 145 x 138 x 204 mm



## Freedom Par Quad-4 IP

**DMX Channels:** 4, 6 or 10  
**Light Source:** 4 LEDs (quad-color RGBA) 5 W, (2 A), 50,000 hours  
**Beam Angle:** 15°  
**Illuminance:** 2,464 lux @ 2 m  
**IP Rating:** IP54  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 3.6 kg  
**Size:** 145 x 138 x 191 mm



## COLORband PiX IP

**DMX Channels:** 3, 4, 6, 7, 9, 12, 18 or 36  
**Light Source:** 12 LEDs (tri-color RGB) 3 W (1,050 mA), 50,000 hours  
**Beam Angle:** 20°  
**Illuminance:** 2,325 lux @ 2 m  
**IP Rating:** IP65  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 6.1 kg  
**Size:** 993 x 100 x 173 mm



# EVENT

SIOUXLAND  
oral & maxillofacial  
surgery

A new day of production lighting power. Stage-ready fixtures produce powerful warm spots and washes to highlight the action.

# EVEseries



## EVE F-50Z

**DMX Channels:** 1 or 3  
**Light Source:** 1 LED (warm white)  
50 W, (1.3 A), 50,000 hours  
**Color Temperature:** 3500 K  
**Zoom Angle:** (manual): 17° to 50°  
**Illuminance:** (17°): 4,780 lux @ 2 m  
**Illuminance:** (50°): 998 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 3.9 kg  
**Size:** 281 x 212 x 328 mm



## EVE TF-20

**Light Source:** 1 LED (warm white COB)  
20 W, (0.5 A), 50,000 hours  
**Color Temperature:** 2700 K  
**Beam Angle:** 24°  
**Illuminance:** 1,506 lux @ 2 m  
**Input Voltage:** 85 to 120 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 1.2 kg  
**Size:** 153.5 x 140 x 184 mm



## EVE E-100Z

**DMX Channels:** 1 or 3  
**Light Source:** 1 LED (warm white)  
100 W (2.3 A), 50,000 hours  
**Color Temperature:** 3500 K  
**Gobo Size:** M (66 mm outside, 48 mm image, 2 mm max thickness)  
**Zoom Angle:** (manual): 14° to 30°  
**Illuminance:** (14°): 15,100 lux @ 2 m  
**Illuminance:** (30°): 3,800 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 5.7 kg  
**Size:** 611 x 183 x 430 mm



## EVE E-50Z

**DMX Channels:** 1 or 3  
**Light Source:** 1 LED (warm white)  
**Color Temperature:** 3500 K  
50 W, (1.3 A), 50,000 hours  
**Gobo Size:** D (53.3 mm outside, 43 mm image, 2 mm max thickness)  
**Zoom Angle:** (manual): 20° to 39°  
**Illuminance:** (20°): 7,910 lux narrow @ 2 m  
**Illuminance:** (39°): 2,710 lux wide @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz  
(auto-ranging)  
**Weight:** 4.2 kg  
**Size:** 480 x 157 x 381 mm  
**CRI:** 81

# EVE





# EVEseries



## EVE P-150 UV

**DMX Channels:** 1 or 5  
**Light Source:** 40 LEDs (UV) 150 W total, (2 A), 50,000 hours  
**Coverage Angle (narrow lens):** 25°  
**Coverage Angle (no lens):** 35°  
**Coverage Angle (wide lens):** 45°  
**Illuminance:** 1,506 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 3.5 kg  
**Size:** 220 x 245 x 305 mm



## EVE P-140 VW

**DMX Channels:** 3 or 9  
**Light Source:** 40 LEDs (13 cool white, 13 warm white, 14 amber) 140 W total, (2.4 A), 50,000 hours  
**Beam Angles:** 25°, 35° or 45°  
**Illuminance (25°):** 2,490 lux @ 2 m  
**Illuminance (35°):** 1,245 lux @ 2 m (no lens installed)  
**Illuminance (45°):** 806 lux @ 2 m  
**Color Temperature Range:** 2700 to 13000 K  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 3.5 kg  
**Size:** 220 x 245 x 305 mm



## EVE P-130 RGB

**DMX Channels:** 3 or 9  
**Light Source:** 40 LEDs (13 red, 13 green, 14 blue) 130 W total, (2.5 A), 50,000 hours  
**Beam Angles:** 25°, 35° or 45°  
**Illuminance (25°):** 2190 lux @ 2 m  
**Illuminance (35°):** 1100 lux @ 2 m (no lens installed)  
**Illuminance (45°):** 727 lux @ 2 m  
**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)  
**Weight:** 3.5 kg  
**Size:** 220 x 245 x 305 mm

# STROBE



Strong strobe with a punchy dual zone blinder with warm white COB LEDs, it also includes an expansion bracket that allows a quick attachment of a second unit to create a 4-head blinder.

# strobe**lights**



## Shocker 2

**DMX Channels:** 1, 2, 4 or 7

**Light Source:** 2 COB LEDs (warm white) 85 W, (3.6 A), 50,000 hours

**Strobe Rate:** 0 to 400 Hz

**Beam Angle:** 51°

**Field Angle:** 81°

**Color Temperature:** 3200 K

**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)

**Weight:** 4.7 kg

**Size:** ?



---

**Global Headquarters**

5200 N.W. 108th Avenue  
Sunrise, FL 33351  
USA

**California Branch**

7555 N San Fernando Road  
Burbank, CA 91505  
USA

**UK Branch**

Brookhill Road Industrial Estate  
Pinxton, Nottingham, NG16 6NT, UK

**Belgium Branch**

Stokstraat 18 9770 Kruishoutem Belgium

**Mexico Branch**

Av. de las Partidas 34, 3-B  
(entrada por Calle 2)  
Zona Industrial Lerma Lerma,  
México, C.P. 52000