



to become a **CHAUVET DJ VIP**



Sign up online for FREE

Register selected CHAUVET DJ gear purchased from authorized USA dealers & mail in original UPCs



Earn & redeem points for CHAUVET DJ gear

With our rewards program, you earn points every time you purchase select CHAUVET DJ gear from an authorized CHAUVET DJ dealer in the 48 contiguous United States. Redeem your points to receive select CHAUVET DJ gear.

VIPREWARDS

Sign up! chauvetdjvip.com Cover Photo by: Victor Cervantes, IVC Producciones, Cartagena, Colombia

Table of Contents



VIDEO PANELS



MOVING HEADS & SCANNERS

| Intimidator Hybrid 140SR |
|--|
| Intimidator Beam 140SR |
| NEW Intimidator Spot 475Z |
| Intimidator Wash Zoom 450 |
| Intimidator Spot 375Z |
| NEW Intimidator Spot 360 |
| Intimidator Beam 355 |
| Intimidator Trio |
| NEW Intimidator Snot 260 |
| NEW Intimidator Spot 260 Intimidator Spot Duo 155 |
| Intimidator Spot 155 |
| Intimidator Wave 360 |
| Intimidator Wave 300 |
| |
| NEW Intimidator Spot 110 |
| NEW Intimidator Scan 110 |
| |



ATTERY & WIRELESS DMX

| Freedom Flex H4 IP man | .1 | |
|---------------------------|----|--|
| Freedom Flex Battery True | .1 | |
| Freedom H1 pron. | 1 | |
| Freedom Stick min | 1 | |
| Freedom Stick Pack mm | .1 | |
| Freedom Par Tri-6 | 1 | |
| Freedom Par Quad-4 IP | .1 | |
| Freedom Par Quad-4 mon | .1 | |
| Freedom Par Hey-/ | 1 | |



| COLORband PiX IP | - |
|-----------------------|-----|
| | |
| SlimPANEL Tri 24 IP | |
| Festoon | |
| Festoon VW | . 1 |
| Freedom Par Quad-4 IP | .1 |
| Freedom Flex H4 IP | .1 |



BO PROJECTORS

| EVE E EOZ | | |
|-----------------|---|------|
| EVE E-50Z | | |
| EVE E-100Z | | |
| EZGobo | | |
| Gobo Zoom USB |) | |
| G000 Z00111 03B | | |



BTAir™... NEW EZLink Par Q4 BT SlimPAR Q12 BT ... SlimPAR T12 BT COLORband T3 BT .



| EVE E 607 |
|---|
| EVE F-50Z |
| EVE TF-20 |
| EVE P-150 UV |
| EVE P-140 VW |
| EVE P-130 RGB |
| NEW EVE P-100 WWV |
| SlimPAR Pro W USB |
| SlimPAR Pro Q USB |
| SlimPAR Pro H USB |
| SlimPAR Pro QZ12 USB |
| NEW EZLink Par Q4 BT 1100 |
| NEW EZLink Par Q6 BT IIII |
| NEW EZLink Strip Q6 BT 11110 NEW 4BAR LT Quad BT |
| NEW 4BAR LI Quad BI |
| SlimPAR Q12 BT |
| SlimPAR T12 BT |
| COLORband T3 BT |
| EZpar 64 RGBA |
| EZpar 64 RGBA mm. EZpar 56 mm. EZpar T6 USB mm. |
| EZpar 16 USB mm |
| EZWedde Irl Diole |
| COREpar 80 USB |
| COREpar 40 USB |
| COREpar UV USB |
| Core 3x3COLORband PiX USB |
| COLORband PiX USB |
| COLORband H9 USB |
| COLORband PiX-M USB |
| COLORband T3 USB |
| COLORrail IRC |
| COLORstripCOLORstrip Mini |
| COLORstrip Mini |
| COLORpalette |
| SlimBANK T18 USB |
| SlimPAR QUV 12 USB |
| SlimPAR H6 USB |
| SlimPAR Q6 USB |
| SlimPAR Q12 USB |
| SlimPAR T12 USB |
| SlimPAR T6 USB |
| SlimPAR 64 |
| SlimPAR 64 RGBA |
| SlimPAR 56 |
| Wedge Tri |
| |
| CDOTI ICUTE |
| SPOTLIGHTS |
| |

NEW EZpin Pack 4 prop...

| LED Followspot 75STLED Followspot 120ST | |
|---|--|
| LASERS | |
| Scorpion Dual Scorpion Storm FX RGB NEW Scorpion Dual RGB | |
| | |



| NEW 4BAR LI QUAO BI | 40 |
|---------------------|----|
| 4BAR Flex T USB | 41 |
| GigBAR 2 | |
| GigBAR Flex | |
| 6SPOT | |
| 4PLAY | |
| | |
| Festoon | |
| Festoon VW | |
| Wash FX 2 | |
| FXarray Q5 | |
| EXpar 3 | |
| FXpar 9 | |
| Abyss USB | 44 |
| Helicopter Q6 | 44 |
| Swarm Wash FX | 44 |
| Swarm 5 FX | 44 |
| Swarm 4 FX | 45 |
| Rotosphere Q3 | 45 |
| Derby X | |
| Line Dancer | |
| Mini Kinta IRC | |
| Kinta FX | |
| Mushroom | |
| JAM Pack Gold | |
| DJ Bank | |
| Duo Moon | |
| LX-5 | |
| BOB LED | |
| DUD LED | 47 |
| | |
| BLACKLIGHTS | |
| DLACKLIGITIS | |

| K | LIC | 3H | ITS | 3 | | | |
|---|-----|----|-----|---|------|------|---|
| В | | | | | | | 4 |

| EVE P-150 U SlimSTRIP U | /-18 |
|----------------------------|-------|
| ST | ROBES |





| Hurricane Haze 2D | .52 |
|------------------------|-----|
| Hurricane Haze 1DX | .52 |
| Hurricane 2000 | .52 |
| Hurricane 1800 Flex | .53 |
| Hurricane 1302 | |
| Hurricane 1000 | .53 |
| Hurricane 1600 | .53 |
| Hurricane 1200 | .53 |
| Hurricane 700 | .53 |
| Cumulus | |
| Nimbus | .54 |
| Bubble King (B-550) | .55 |
| Bubble Machine (B-250) | .55 |
| Atmospheric Remotes | |
| Atmospheric Fluids | .55 |
| | |



| EW VIVIG Drive 28N | 5 |
|--------------------|----|
| EW EZLink FS BT | 25 |
| TAir tm | 56 |
| lareCON | 56 |
| lareCON Air | 56 |
| howXpress | |
| press 512 Plus | |
| press 512 | |
| press 100 | |
| MX-RT | |
| MX-AN | |
| I-Fi Hub | |
| RC-6 | 60 |
| bey 40 D-Fi 2.4 | bU |
| bey 70 | |
| bey 40bey 10 | |
| bev 4 | |
| lbey 6 | |
| bey 3 | |
| tage Designer 50 | |
| MX-4 | |
| ata Stream 4 | |
| oot-C 2 | |
| ata Stream 8 | |
| RO-D6 | |
| | |





| Straight Sections |
|----------------------|
| Arc Sections |
| Video Mount |
| Corners |
| Base Plates |
| Accessories |
| Clamps |
| Stands |
| Quick Truss Hardware |
| Kits |
| Glo Totems. |
| Scrims |







Multiple magnets

and positioning pins

effortlessly allow a tool

free, one-person setup



faster than other panels







Vivid 4

Vivid 4 is a modular video panel that vividly displays content without the need of bulky media servers. Create dazzling video displays with these lightweight video panels that feature black body LEDs that accurately reproduce high-contrast videos. Vivid 4 makes a perfect DJ façade and seamlessly integrates with Serato for displaying music videos to add gig excitement. Setup is easy and fast with multiple magnets and positioning pins that make getting up and running tool-free and effortless. Stellar reliability and quality are built into Vivid 4. Dual power supplies ensure downstream panels don't lose signal. Intelligent modules with dedicated memory improve the image quality and simplify maintenance. Panels can be suspended vertically or horizontally offering different aspect ratio options. Multiple Speego connectors mean Vivid 4 sets up twice as fast as other panels.

- Light Source: 21,632 SMD 2020 LEDs (tri-color RGB) 0.3 W, (60 mA), 50,000 hours
- Wavelength: 620 to 625 nm red, 516 to 530 nm green, 460 to 475 nm blue
- Viewing Angle: 120°
- Maximum Illuminance: 1,200 NITS
- Calibrated Illuminance: 1,000 NITS
- Contrast Ratio: 4,300:1
- Refresh Rate: 1.920 Hz
- Pixel Density: 43,264 m2 (104 x 208)
- Pixel Pitch: 4.8 mm
- Minimum Viewing Distance: 12 ft (4 m)
- Control Protocol: Novastar
- Power I/O Connectors: Seetronic® powerKON®
- Signal I/O Connectors: Seetronic® etherKON®
- Power Linking: 7 units @ 120 V; 13 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 280 W, 2.3 A @ 120 V, 60 Hz
- Power and Current: 280 W, 1.2 A @ 230 V, 50 Hz
- Weight: 27.6 lb (12.5 kg)
- Size: 19.7 x 2.6 x 39.4 in (500 x 65 x 1000 mm)
- Maximum Vertical Hang: 23 panels
- Maximum Horizontal Hang: 17 panels
- Niaximum Horizontai Hang. 17 pa
- Required Controllers: Vivid Drive 28N
- Optional Mounting Brackets: RB-F50CM, RB-F100CM



Available RB-F50CM and RB-F100CM Mounting Rig Bars



Vivid Drive 28N

Vivid Drive 28N is an easy-to-use video driver for CHAUVET DJ Vivid video panels or any Novastar video panel. No computer needed! Vivid Drive 28N features powerful standalone mapping and a built-in video scaler for quick resizing of video content. Numerous input/output options are on board as well as backlit buttons for easy viewing in dark environments. The front knob can be set to control the master dimmer and you can seamlessly transition between different inputs with multiple transition effects. Compact 1U packing eases transportation and integration into your existing setup.

- Rackmount: 1U
- Control Protocol: Novastar
- Control Input Connectors: USB, RJ45
- Video Input Connectors: HDMI, Display Port, DVI, VGA (x3), CVBS (x2)
- Video Output Connector: DVI, VGA, RJ45 (x2)
- Max. Supported LEDs: 1.310.720
- Max. Supported Panels (Vivid 4): 30 per RJ45
- Max. Supported Resolution: 1920 x 1080
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 42 W. 0.7 A @ 120 V. 60 Hz
- Power and Current: 42 W. 0.4 A @ 230 V. 50 Hz
- Weight: 4.8 lb (2.2 kg)
- Dimensions: 19 x 12 x 1.7 in (483 x 305 x 44 mm)









Intimidator Hybrid 140SR

Intimidator Hybrid 140SR is a true hybrid moving head that is an all-in-one light fixture that transfoms from SPOT to BEAM to WASH effortlessly. It is fitted with an intense 140 W discharge light engine and can create dynamic beam effects with dual overlapping, independently controlled prisms. Dual gobo wheels allow for gobo morphing and amazing mid-air projections and the motorized zoom works in beam, spot and wash modes for ultimate light control. The glass optics of Intimidator Hybrid 140SR ensures crisp beams and gobos.

- DMX Channels: 13 or 19
- Light Source (included): Osram Sirius HRI 140 W discharge lamp, 6,000 hours
- Zoom Angle Motorized (beam): 3° to 11° (spot): 7° to 21° (wash): 14° to 28°
- Gobo Wheel (1): 9 + open, rotating, indexing, interchangeable, slot-n-lock, continuous scroll at
- Gobo Wheel (2): 17 + open, metal, continuous scroll at variable speeds
- Colors: 12 + white, split colors, continuous scroll at variable speeds
- Prism (1): 8-facet round, bidirectional rotation at variable speeds
- Prism (2): 6-facet linear, bidirectional rotation at variable speeds
- Illuminance (3° beam): 382,000 lux @ 5 m
- Illuminance (7° spot): 104,700 lux @ 5 m
- Illuminance (14° wash): 4,680 lux @ 5 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 33.5 lb (15.2 kg)
- Size: 12.7 x 8.7 x 20.2 in (322 x 220 x 513 mm)



















Intimidator Beam 140SR

Intimidator Beam 140SR is a cutting-edge moving head beam fitted with an intense 140 W discharge light engine. Its motorized frost filter converts the tight beam to a wide wash for different applications. An impressive 16-facet prism splits the beam and intensifies the excitement. Built-in Totem mode keeps the light on and over the dance floor and non-DMX control is available with the optional IRC-6 wireless remote. On-board power linking saves time running extension cords.

- DMX Channels: 9 or 15
- Light Source (included): Osram Sirius HRI 140 W discharge lamp, 6,000 hours
- Beam Angle (beam): 3°
- Beam Angle (frost): 21°
- Gobos: 17 + open (all Aluminum), Fixed, continuous scroll at variable speeds
- Colors: 14 + white, split colors, continuous scroll at variable speeds
- Prism: 16-facet round, bidirectional rotation at variable speeds
- Illuminance: 382.000 lux @ 5 m
- Illuminance: 37,900 lux @ 15 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 25.8 lb (11.7 kg)
- Size: 12.7 x 8.7 x 16.5 in (322 x 220 x 420 mm)























Intimidator Spot 475Z

Intimidator Spot 475Z is a powerful moving head designed for spotlighting large events. This fixture can adapt to short-throw or long-throw situations, courtesy of its motorized zoom. Achieve incredible visual effects with dual rotating prisms which split the beam, creating dramatic displays. It also comes equipped with dual gobo wheels for gobo morphing and amazing mid-air projections! This feature-packed powerhouse utilizes motorized focus to channel crisp projections at almost any distance. Beams stay where you want them with built-in totem mode. It has powerCON®compatible power input/output connections for power linking.

- DMX Channels: 10 or 16
- Light Source: 1 LED (white) 250 W, (16.3 A), 50,000 hours
- Colors: 7 + white, split colors, continuous scroll at variable speeds
- Gobos wheel (1): 7 + open (6 metal + 1 glass), rotating, interchangeable, indexing, continuous scroll at variable speeds
- Gobo wheel (2): 8 + open, continuous scroll at variable speeds
- Prism (1): 6-facet round, bidirectional rotation at variable speeds
- Prism (2): 6-facet linear, bidirectional rotation at variable speeds
- Zoom Angle (motorized): 13° to 28°
- Illuminance (13°): 106,300 lux @ 2 m Illuminance (28°): 23.680 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 36.2 lb (16.5 kg)
- Size: 14.3 x 9.8 x 20.9 in (363 x 250 x 531 mm)













Intimidator Wash Zoom 450

Intimidator Wash Zoom 450 is a powerful moving head wash fitted with twelve 15 W guad-color RGBW LEDs and a motorized zoom for short or long-throw applications. Other convenient features include a Totem mode that keeps beams aimed at the dance floor and eye-catching auto programs with zone control. Wireless (non-DMX) control is possible using the optional IRC-6 remote. Up to four fixtures can be linked to create synchronized shows in automated, sound and master/slave modes. Plus, it comes with powerCON®-compatible power input/output connections. Fits best in the CHS-50 VIP Gear Bag.



- DMX Channels: 14 or 29
- Light Source: 12 LEDs (quad-color RGBW) 15 W (3.7 A), 50,000 hours
- Zoom Angle (motorized): 14° to 58°
- Illuminance (14°): 25,610 lux @ 2 m
- Illuminance (58°): 1,960 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 219 W, 1.9 A @ 120 V, 60 Hz
- Power and Current: 207 W, 1 A @ 230 V, 50 Hz
- Weight: 15.9 lb (7.2 kg)
- Size: 7.6 x 10.9 x 14.3 in (194 x 277 x 363 mm)















Intimidator Spot 375Z

Intimidator Spot 375Z is an exceptionally bright, 150 W LED moving head spot designed for large events. It features motorized zoom for short or long-throw applications. Dual rotating prisms split the beam for great effects and to cover a larger area. The motorized focus ensures crisp projections at almost any distance and the built-in Totem mode keeps the beams exactly where you want them. Intimidator Spot 375Z includes built-in, automated and sound-activated programs or it can be controlled in DMX or master/ slave mode. powerCON®-compatible power input/output connections for power linking are also onboard.

- DMX Channels: 9 or 15
- Light Source: 1 LED (white) 150 W, (12.3 A), 50,000 hours
- Zoom Angle (motorized): 10° to 23°
- Colors: 7 + white, split colors, continuous scroll at variable speeds
- Gobos: 7 + open (6 aluminum + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
- Gobo Size: 24 mm outside, 20 mm image, 1 mm max. thickness
- Prism (1): 6-facet round, bidirectional rotation at variable speeds Prism (2): 5-facet linear, bidirectional rotation at variable speeds
- Illuminance (10°): 38,000 lux @ 2 m / (23°): 19,850 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 27.3 lb (12.4 kg)
- Size: 8.7 x 12.7 x 18.3 in (220 x 322 x 466 mm)





















Intimidator Spot 360 is a 100 W LED packed with mobile event lighting power. Dual rotating prisms are on board to split the beam and cover a larger area with Intimidator Spot 360's impressive visuals. Throw light even farther by decreasing the beam angle 5° using the manual zoom. dramatic looks. A rotating 3-facet prism splits the Motorized focus gives you the ability to create sharp gobo patterns from almost any distance and Totem mode lets converts the beam to a wash. The onboard full-color you keep the beams forward. Intimidator Spot 360 lets display is IRC-6 compatible and features Totem mode you set, save, and recall 1 scene manually, directly from and onboard memory for storing a scene. Intimidator the full-color LCD display. Intimidator Spot 360 uses Beam 355 has powerCON®-compatible power input/ powerCON®-compatible power input/output connections output connections for power linking. for power linking.

Optional IRC-6 Remote

and Intimidator

Road Case S35X

- DMX Channels: 8 or 14
- Light Source: 1 LED (white) 100 W, (3.2 A), 50,000 hours
- Colors: 8 + white, split colors, continuous scroll at variable speeds
- Gobos: 7 + open (6 metal + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
- Gobo Size: 24 mm outside, 20 mm image, 1.1 mm max thickness
- Prism (1): 3-facet round, bidirectional rotation at variable speeds
- Prism (2): 5-facet linear, bidirectional rotation at variable speeds
- Zoom Angle (manual): 12° to 17°
- Illuminance (12°): 35,010 lux @ 2 m
- Illuminance (17°): 19,710 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 25 lb (11.4 kg)
- Size: 16.65 x 12.68 x 11.69 in (423 x 322 x 297)





Intimidator Beam 355

Intimidator Beam 355 is a powerful and feature-packed moving head beam fitted with a 100 W LED. Easily generate complex looks using the fixed gobo wheel that includes a unique animation effect to create additional beam to cover larger areas. The motorized frost filter

- DMX Channels: 8 or 14
- Light Source: 1 LED (white) 100 W, (27 A), 50,000 hours
- Beam Angle: 3°
- Gobos: 5 + open, animation effect, continuous scroll at variable speeds
- Colors: 8 + white, split colors, continuous scroll at variable speeds
- Prism: 3-facet round, bidirectional rotation at variable speeds
- Illuminance: 262,800 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 25.6 lb (11.6 kg)
- Size: 12.7 x 8.7 x 18.9 in (322 x 220 x 480 mm)











Intimidator Trio

DMX Channels: 15 or 30

Weight: 20.3 lb (9.2 kg)

Zoom Angle (motorized): 7° to 53°

Illuminance (7°): 16,000 lux @ 2m

Illuminance (53°): 1,350 lux @ 2 m

50.000 hours

Intimidator Trio is an innovative, LED-powered moving head that works brilliantly as a beam, wash and effect fixture. The fixture's motorized zoom allows seamless 75W LED and motorized focus that lets you project crisp changes, from a narrow beam to a wide wash. Its continuously rotating honeycomb delivers the decreasing the beam angle 5° using the manual zoom. excitement of an effect light. Built-in auto programs with zone control make it easy to create complex looks. For beams on the dance floor and a 3-facet prism splits the even more elaborate looks, master/slave programs can be coordinated for up to 4 fixtures with no programming. A built-in Totem mode allows the beams to remain focused on the dance floor.



Light Source: 6 LEDs (quad-color RGBW) 21 W (6.3 A),

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 10.9 x 10.9 x 15.2 in (278 x 278 x 386 mm)

- Colors: 8 + white, split colors, continuous scroll at
- variable speeds
- Gobos: 7 + open (6 metal + 1 glass), rotating, variable speeds
- Gobo Size: 24 mm outside, 20 mm image, 1.1 mm max thickness
- Zoom Angle (manual): 12° to 17°
- Illuminance (12°): 12,030 lux @ 2 m
- Illuminance (17°): 2,530 lux @ 2 m

- Size: 9.1 x 6.4 x 13.8 in (232 x 163 x 351 mm)



















convenient, wireless non-DMX control using the optional

IRC-6 remote. Intimidator Spot 260 has powerCON®-

Give your mobile performances some lighting punch with

the feature-packed Intimidator Spot 260. It features a

gobos from nearly any distance. Throw light farther by

Keep the party energized using Totem mode that keeps

DMX Channels: 8 or 14 Light Source: 1 LED (white) 75 W. (3.3 A), 50,000 hours

Intimidator Spot 260

interchangeable, slot-n-lock, continuous scroll at

Prism: 3-facet round, static

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 12.2 lb (5.6 kg)















Intimidator Spot Duo 155

Intimidator Spot Duo 155 is a dual moving head fixture featuring two bright, compact and lightweight moving heads pre-mounted on a single bar. A built-in pass-through hole makes it easy to safely mount this versatile fixture on a tripod. Separate color and gobo wheels, smooth dimming and adjustable strobe speed increase design options. Generate a synchronized show with two fixtures in master/slave mode. Minimize programming time with separate built-in movement macros for sound and automated modes. Multiple units can be power linked to save time running cables and extension cords.



- DMX Channels: 10, 17 or 20
- Light Source: 2 LEDs (white) 32 W (2.3 A), 50,000 hours
- Beam Angle: 15°
- Gobos: 9 + open (9 metal), continuous scroll at variable speeds
- Colors: 9 + white, split colors, continuous scroll at variable speeds
- Illuminance: 5.550 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 20.3 lb (9 kg)
- Size: 21.5 x 6.5 x 11.4 in (546 x 165 x 290 mm)







Intimidator Spot 155

Intimidator Spot 155 is a bright, compact, and lightweight LED moving head, perfect for mobile applications. Rely on it to energize any dance floor with fast and precise movements, crisp optics and even output. Built-in performance features like separate color and gobo wheels, ultra-smooth dimming and adjustable strobe speed enhance any light show. Minimize programming time with built-in movement macros, move-in-black features and sound-activated automated programs that can generate a synchronized show in master/slave mode. This user-friendly fixture also offers individual reset of pan/tilt, color, and gobo. Multiple units can be power linked to save time running cables and extension cords.



- DMX Channels: 6 or 11
- Light Source: 1 LED (white) 32 W (2.3 A), 50,000 hours
- Beam Angle: 17°
- Gobos: 9 + open (9 aluminum), continuous scroll at variable speeds
- Colors: 9 + white, continuous scroll at variable speeds
- Illuminance: 4.860 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 9.7 lb (4.4 kg)
- Size: 8.1 x 8.3 x 11.5 in (205 x 211 x 291 mm)







Intimidator Wave 360

Intimidator Wave 360 brings a "wave" of excitement to your next event. This dynamic effect features four independently controlled 12 W quadcolor LED moving heads on a single rotating base. With its razor sharp beams, continuous pan rotation and adjustable tilt ranges, Intimidator Wave 360 produces the kind of astounding lightshows that set you apart. Up to four units (16 moving heads in total!) can be linked in automatic, sound or master-slave mode. An optional IRC-6 remote can be used for



- DMX Channels: 17 or 33
- Pan and Tilt: 360° (continuous) /270°
- Light Source: 4 LEDs (quad-color RGBW) 12 W (3.9 A) 50,000 hours
- Beam Angle: 5°
- Illuminance: 16,670 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 19.4 lb (8.8 kg)
- Size: 22 x 7.4 x 11.7 in (559 x 189 x 297 mm)





Intimidator Scan 305

Intimidator Scan 305 features a bright 60 W LED and a crisp 3-facet prism that allows you to split the beam and cover larger areas. Link up to four fixtures to create synchronized shows in automated, sound or master/ slave mode. Save time running cables and extension cords. Minimize programming time using built-in movement macros and move-in-black features. For easy (non-DMX) operation, control it with the optional IRC-6 remote. Fits best in the CHS-40 VIP Gear Bag.



- DMX Channels: 7 or 11
- Light Source: 1 LED (white) 60 W (2.3 A), 50,000 hours
- Beam Angle: 15°
- Gobos: 7 + open (5 metal + 2 glass), rotating, interchangeable, slot-n-lock, continuous scroll at variable speeds
- Gobo Size: 23.9 mm outside, 20.5 mm image, 1 mm max. thickness
- Colors: 8 + white, split colors, continuous scroll at variable speeds
- Prism: 3-facet round, static
- Illuminance: 9,110 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 10.1 lb (4.6 kg)
- Size: 16.9 x 10 x 5.8 in (430 x 255 x 147 mm)

















Intimidator Spot 110

DMX Channels: 6 or 12

Illuminance: 1.561 lux @ 2 m

Weight: 5.0 lb (2.3 kg)

Beam Angle: 13°

Light Source: 1 LED (cool white) 10 W, (2.1 A), 50,000 hours

Gobos: 7 + open, continuous scroll at variable speeds

Colors: 7 + white, continuous scroll at variable speeds

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 7.5 x 5 x 11 in (190 x 127 x 279 mm)

Small but mighty, the compact Intimidator Spot 110 is a lightweight LED moving head prefect for modest mobile applications. It features separate color and gobo wheels for creative programming but also easy-to-use sound-activated programs for dynamic light shows to sync to the music. Built-in automated programs are also on board the Intimidator Spot 110 and it's easy to generate a synchronized show in Master/Slave mode. Convenient, wireless non-DMX control is available using the optional IRC-6 remote. Fits best in the CHS-40 VIP gear bag.



Intimidator Scan 110

Small and mighty moving beam power! Intimidator Scan 110 is an extremely compact and lightweight LED scanner perfect for mobile applications. Energize any dance floor with fast and precise movements using either sound-activated programs that dance to the beat of the music or convenient, wireless non-DMX control using an optional IRC-6 remote. Intimidator Scan 110 is a time saver too! Built-in movement macros and move-in-black features make programming fast and easy and you can save time running cables and extension cords by power linking multiple units as well. Fits best in the CHS-40 VIP gear bag.



- DMX Channels: 5 or 11
- Light Source: 1 LED (cool white) 10 W, (2 A), 50,000 hours
- Beam Angle: 13°
- Combined Color/gobo combinations: 8 patterns + open
- Illuminance: 1,110 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.6 lb (2.1 kg)
- Size: 7.5 x 4.7 x 10.6 in (190.5 x 119.3 x 269 mm)































Freedom Flex H4 IP features a guick-change battery pack for easy battery

charges and changes making this 100% wireless, battery-operated par with

a built-in D-Fi transceiver even more flexible and powerful. Freedom Flex H4 IP has hex-color (RGBAW + UV) LED technology for unlimited color

mixing capabilities. The fixture is temporary outdoor-rated and has a robust

housing that repels water, snow, dirt, and sand for all-weather applications.

Freedom Flex H4 IP has multiple wireless triggering and control options via

the FlareCON Air and the FlareCON app and it works in master/slave mode

with any Freedom Par. System includes 6 Freedom Flex H4, Charging

• Light Source: 4 LEDs (hex-color RGBAW + UV) 10 W, (2 A), 50,000 hours













Carry Bag with Multi-charge





Freedom H1 is a compact 100% TRUE wireless, battery-operated, LED wash light with a built-in D-Fi transceiver. The fixture features a single hexcolor (RGBAW+UV) 10 W LED. Its magnetic base makes it easy to mount the light to most metal surfaces providing added versatility. Because of its small size, Freedom H1 features effortless transport and set-up. Freedom H1 has a digital display for easy control and adjustment of all settings. Multiple control options include stand-alone mode, wireless DMX or IR. The Freedom H1 X4 system includes 4 fixtures, 4 diffusers, a carry bag. multi-charger and IRC-6 remote. System includes 4 Freedom H1, 1 Multi-Charger, 1 IRC-6 Remote and 1 Carry Bag.



Freedom Stick

- DMX Channels: 3, 8, 48 or 50
- Light Source: 32 SMD LEDs (tri-color RGB) 0.2 W (50mA), 50,000 hours
- Coverage Angle: 360°
- Maximum Run Time (single color): up to 20 hours
- Maximum Run Time (all on): up to 8 hours
- Weight: 3.5 lb (1.6 kg)
- Size: 6.3 x 6.3 x 61 in (161 x 161 x 1550 mm) with base



Freedom Stick Pack

Includes: 4 Freedom Sticks, 1 Multi-Charger, 1 IRC-6 Remote and 1 Carrying Bag.









Weight: 8.8 lb (4 kg)

Freedom Flex H4 IP

DMX Channels: 6, 8 or 12

• Illuminance: 2.163 lux @ 2 m

 Beam Angle: 23° Field Angle: 34°

Road Case and 6 Freedom Flex batteries.

Maximum Run Time (all on): up to 8 hours

• Size: 5.7 x 5.4 x 8 in (145 x 138 x 204 mm)

ACTIVATED OPMABLE OFFICE OFFICE CHS-FR4

- Battery Type: Li-ion
- . Battery Capacity: 11 Ah
- Battery Voltage: 11.1 VDC
- Quantity of Cells: 15
- Rechargeable: Yes
- Watt Hours: 122.1 Wh
- Lithium Content: 131.6 g
- Weight: 2.2 lb (1 kg)
- Size: 5 x 2.1 x 5.2
- (127.83 x 53.16 x 132.62 mm













- Illuminance (w/ filter): 268 lux @ 2 m Illuminance (w/o filter): 314 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single color): up to 20 hours
- Input Voltage: 8.4VDC, 1.35A (external power supply: 100-240 VAC, 50/60 Hz)
- Weight: 1.5 lb (0.7 kg) single unit
- Size: 3.8 x 3 x 5.5 in (97 x 75 x 139 mm) single unit













Freedom Par Tri-6

Freedom Par Tri-6 is powerful, bright, and truly 100% wireless with a rechargeable battery and a built-in D-Fi transceiver. Freedom Par Tri-6 has 18 W of RGB color mixing and can be operated with the control panel, the included CHAUVET DJ IRC-6 remote, or from any mobile phone or tablet running the FlareCON mobile app. Freedom Par Tri-6 fits perfectly inside TRUSST and all other 12" box truss, and travels safely and stylishly in the CHAUVET DJ CHS-FR4 VIP Gear Bag or using the Freedom Charge 9 road case.

- DMX Channels: 3, 4, 5 or 9
- Light Source: 6 LEDs (tri-color RGB) 3 W (600 mA), 50,000 hours
- Beam Angle: 15°
- Illuminance: 1.938 lux @ 2 m
- . Maximum Run Time (all on): 8 hours Maximum Run Time (single color): 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 5.7 lb (2.6 kg)
- Size: 5.4 x 5.7 x 7.2 in (138 x 145 x 184 mm)







IRC-6 Remote Included

Freedom Par Quad-4 IP

Freedom Par Quad-4 IP is a 100% TRUE wireless. battery-operated, quad-color (RGBA) LED Par with built-in D-Fi transceiver. Its temporary outdoor-rated robust housing repels water, snow, dirt, and sand for all-weather applications and is available in black or white. Freedom Par Quad-4 IP works in Master/Slave mode with first-generation Freedom Pars and it has multiple wireless triggering and control options via the FlareCON Air and the FlareCON app. Convenient, wireless non-DMX control is available using the IRC-6 Remote and customized colors can be created using the built-in LED display. Shine light where it is needed using the built-in adjustable kickstand and prevent light spillage with the built-in glare shield. Achieve smooth LED fading with built-in dimming curves and extend the battery's lifespan with built-in discharge protection. Safely store and transport your fixtures from gig to gig

- Maximum Run Time (all on): 8 hours
- Maximum Run Time (single color): 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 6.2 lb (2.8 kg)









IRC-6 Remote Included

Freedom Par Quad-4

Freedom Par Quad-4 is powerful, bright and, truly 100% wireless with a rechargeable battery and a builtin D-Fi transceiver. Freedom Par Quad-4 has 20 W of RGBA color mixing for that extra richness and variety that amber adds to colors. It can be operated with the control panel, the included IRC-6 remote, or from any mobile phone or tablet running the FlareCON mobile app. Freedom Par Quad-4 fits perfectly inside TRUSST and all other 12" box truss, and travels safely and stylishly in the CHAUVET DJ CHS-FR4 VIP Gear Bag or using the Freedom Charge 9 road case.

DMX Channels: 4, 6 or 10

IRC-6 Remote Included

- Light Source: 4 LEDs (quad-color RGBA) 5 W (2 A), 50.000 hours
- Beam Angle: 15°
- Illuminance: 2.300 lux @ 2 m


- Size: 5.4 x 5.7 x 7.2 in (138 x 145 x 184 mm)

Freedom Par Hex-4

The Freedom Par Hex-4 is the most colorful model in the next generation of the Freedom Par family. It has four 10 W RGBAW+UV LEDs for that extra punch and the special effects that white and UV add to color mixing. The Freedom Par Hex-4 has a special limiter option for extending battery life so that when you use more than 4 colors you know you'll get a good long show! The Freedom Par Hex-4 comes in black or white housing so it fits into any décor and travels safely while charging using the Freedom Charge 9 road case.

Available in black or white

- DMX Channels: 6, 8 or 12
- Light Source: 4 LEDs (hex-color RGBAW+UV) 10 W (2 A), 50,000 hours
- Maximum Run Time (single color): 20 hours
- Weight: 6.2 lb (2.9 kg)





- Beam Angle: 23°
- Illuminance: 1,372 lux @ 2 m
- Maximum Run Time (all on): 8 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Size: 5.4 x 5.7 x 7.2 in (138 x 145 x 184 mm)

















Weight: 8 lb (3.6 kg)

in the CHS-FR4 carry bag.

DMX Channels: 4, 6 or 10

Illuminance: 2,464 lux @ 2 m

 Maximum Run Time (all on): 8 hours Maximum Run Time (single color): 20 hours Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

50.000 hours Beam Angle: 15°

IP Rating: IP54



Size: 5.7 x 5.4 x 7.5 in (145 x 138 x 191 mm)



Light Source: 4 LEDs (quad-color RGBA) 5 W, (2 A),





































COLORband PiX IP

or club installers looking to create high-impact visuals by combining flicker free pixel-mapping effects and wash lighting at both indoor and outdoor events. The robust IP65-rated housing withstands water, snow and dirt.

- DMX Channels: 3, 4, 6, 7, 9, 12, 18 or 36
- Light Source: 12 LEDs (tri-color RGB) 3 W (1,050 mA), 50.000 hours
- · Beam Angle: 20°
- Illuminance: 2,325 lux @ 2 m
- IP Rating: IP65
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 13.4 lb (6.1 kg)
- Size: 39 x 3.9 x 6.8 in (993 x 100 x 173 mm)























• Size: 10.5 x 11.9 x 5.3 in (268 x 301 x 134 mm)





SlimPANEL Tri 24 IP

DMX Channels: 3, 5 or 9

Illuminance: 5,850 lux @ 2 m

Weight: 13.7 lb (6.2 kg)

50,000 hours

Beam Angle: 20°

IP Rating: IP65



Festoon | Festoon VW

Dynamic outdoor-rated party décor lights featuring the vintage look and feel of standard party light strings. For full specs, (see page 44)



SlimPANEL Tri 24 IP provides bright and saturated

or outdoors. This IP65-rated fixture is at home in just

about any environment and can withstand the strongest

rainstorms without having to be covered or brought

smooth, even wash onto nearly any surface.

Light Source: 24 LEDs (tri-color RGB) 3 W (1,050 mA),

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

IRC-6 Remote Included Freedom Par Quad-4 IP

Freedom Par Quad-4 IP is a 100% wireless, battery Freedom Flex H4 IP features a quick-change battery operated, quad-color (RGBA) LED wash light with a pack for easy battery charges and changes making this color washes at mobile functions and on stage, indoors built-in D-Fi transceiver and a robust housing that repels water, snow, dirt, and sand during outdoor transceiver even more flexible and powerful. Freedom events. Multiple wireless control options are available inside. Powered by 24 tri-color LEDs, it projects a via the FlareCON Air and the FlareCON app or with the for unlimited color mixing capabilities. The fixture is point-and-shoot IRC-6 remote. Freedom Par Quad-4 IP temporary outdoor-rated and has a robust housing also works in master/slave mode with first-generation that repels water, snow, dirt, and sand for all-weather Freedom fixtures.

- DMX Channels: 4. 6. or 10
- Light Source: 4 LEDs (quad-color RGBA) 5 W, (2 A), 50 000 hours
- Beam Angle: 15°
- Illuminance: 2.464 lux @ 2 m
- IP Rating: IP54
- Maximum Run Time (all on): 8 hours
- Maximum Run Time (single color): 20 hours Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 8 lb (3.6 kg)
- Size: 5.7 x 5.4 x 7.5 in (145 x 138 x 191 mm)







Charge multiple units with the Freedom Flex H4 IP X6

Freedom Flex H4 IP

 Light Source: 4 LEDs (hex-color RGBAW + UV) 10 W. (2 A). 50.000 hours Beam Angle: 23°

Charging Road Case and 6 Freedom Flex batteries.

100% wireless, battery-operated par with a built-in D-Fi

Flex H4 IP has hex-color (RGBAW + UV) LED technology

applications. Freedom Flex H4 IP has multiple wireless

triggering and control options via the FlareCON Air and

the FlareCON app and it works in master/slave mode with

any Freedom Par. System includes 6 Freedom Flex H4,

- Field Angle: 34°
- Illuminance: 2,163 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single color): up to 20 hours
- IP Rating: IP-54
- Weight: 8.8 lb (4 kg)
- Size: 5.7 x 5.4 x 8 in (145 x 138 x 204 mm)









CDIPPOWER5 16.4 ft (5 m) Compatible with: COLORrail IP. SlimPAR 56 IP



16.4 ft (5 m) Compatible with SlimPANEL Tri 24 IP, COLORband PiX IP



IRC-6 Remote Included

16.4 ft (5 m) Compatible with: SlimPANEL Tri 24 IP, SlimPAR 56 IP COLORrail IP, COLORband PiX IP













EVE TF-20 is a compact, energy efficient, soft edge LED

accent luminaire that can function as a regular PAR

can, while its classic Fresnel style emulates stage and

theatrical lighting. Conveniently included barn doors

block light from unwanted areas, letting you focus on a particular space or object. Thanks to its CCR (Constant

Current Reduction) LED dimming, it works seamlessly

with conventional dimmers, and is flicker-free in filmed

productions. MET certified, it is equally suited for new

and retrofit installations via the included track adaptor

as it is for mobile use right out of the box using its

EVE E-50Z

EVE E-50Z is an LED ellipsoidal that shines a hardedged, warm white spot and features D-Fi USB compatibility for wireless master/slave or DMX control. Manual zoom gives you the flexibility to project from any distance and its framing shutters let you easily alter and control the projected beam. EVE E-50Z includes holders for glass and steel gobos as well as a gel frame. You can operate EVE E-50Z in standalone mode eliminating the need for DMX control and you can save time running extension cords by power linking multiple units.

- DMX Channels: 1 or 3
- Light Source: 1 LED (warm white) 50 W, (1.3 A), 50,000 hours
- Color Temperature: 3,500 K
- Gobo Size: D (53.3 mm outside, 43 mm image, 2 mm max. thickness)
- Zoom Angle (manual): 20° to 39°
- Illuminance (20°): 7,910 lux @ 2 m
- Illuminance (39°): 2,710 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 9.3 lb (4.2 kg)
- Size: 18.9 x 6.2 x 15 in (480 x 157 x 381 mm)









EVE E-100Z is a powerful spot fixture featuring sharp pattern projection with a 100 W warm white LED light source. Features D-Fi USB compatibility for wireless master/slave or DMX control. This versatile fixture works with metal or glass gobos to create incredible gobo or pattern details. The manual zoom and framing shutters make it simple to control beams.

DMX Channels: 1 or 3

EVE E-100Z

- Light Source: 1 LED (warm white) 100 W (2.3 A),
- Color Temperature: 3,500 K
- Gobo Size: M (66 mm outside, 48 mm image, 2 mm max. thickness)
- Zoom Angle (manual): 14° to 30°
- Illuminance (14°): 15.100 lux @ 2 m
- Illuminance (30°): 3,800 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging
- CRI: 80
- Weight: 12.6 lb (5.7 kg)
- Size: 24 x 7.2 x 16.9 in (611 x 183 x 430 mm)

EVE F-50Z

EVE F-50Z is a powerful warm white 50 W Fresnel fixture, perfect for theatrical, worship and broadcast installations. It features D-Fi USB compatibility for wireless master/slave or DMX control. Included barn doors and gel frame let you shape and color the beam for the perfect spot. EVE F-50Z has a locking power connector and its smooth dimming capabilities make it great for video applications. EVE F-50Z is easily controllable via DMX.

- DMX Channels: 1 or 3
- Light Source: 1 LED (warm white) 50 W, (1.3 A),
- Color Temperature: 3,500 K
- Zoom Angle (manual): 17° to 50°
- Illuminance (17°): 4,780 lux @ 2 m
- Illuminance (50°): 998 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 92
- Weight: 8.4 lb (3.9 kg)
- Size: 11.1 x 8.3 x 12.9 in (281 x 212 x 328 mm)

standard power cord.

- Light Source: 1 COB LED (warm white) 20 W, (0.5 A), 50,000 hours
- Color Temperature: 2,700 K
- Beam Angle: 24°

EVE TF-20

- Illuminance: 1,506 lux @ 2 m
- Input Voltage: 85 to 120 VAC, 50/60 Hz (auto-ranging)
- CRI: 91
- Weight: 2.6 lb (1.2 kg)
- Size: 6 x 5.5 x 7.2 in (153.5 x 140 x 184 mm)



























EVE P-150 UV

EVE P-150 UV is a brawny blacklight cannon fitted with 40 UV LEDs emitting 150 W of blacklight power. The unit is designed without a fan and its silent operation combined with its flicker-free output make it ideal for video use. EVE P-150 UV is D-Fi USB compatible giving users the option to control the light wirelessly in master/slave mode or wireless DMX control. 25° and 45° magnetic lenses to adjust the beam are included along with a gel frame holder and accessory slot for optional barn doors.

- DMX Channels: 1 or 5
- Light Source: 40 LEDs (UV) 150 W total, (2 A), 50,000 hours
- Accessory Holder/Gel Frame Size: 6.25 in (159 mm)
- Wavelength: 395 nm
- Coverage Angle: (narrow lens): 25° (no lens): 35° (wide lens): 45°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 7.6 lbs (3.5 kg)
- Size: 8.7 x 9.6 x 12 in (220 x 245 x 305 mm)

















EVE P-140 VW

EVE P-140 VW is a variable white wash light featuring cool white, warm white and amber LEDs. EVE P-140 VW is a D-Fi USB compatible fixture providing the option to control the fixture wirelessly in master/slave mode or with DMX control. This sturdy wash light has a built-in gel frame holder and a 6 ¼ - inch accessory slot to hold optional barn doors. EVE P-140 VW comes with 25° and 45° interchangeable lenses that attach magnetically to alter the beam for added lighting flexibility.

- DMX Channels: 3 or 9
- Light Source: 40 LEDs (13 cool white, 13 warm white, 14 amber) 140 W total, (2.4 A), 50,000 hours
- Accessory Holder/Gel Frame Size: 6.25 in (159 mm)
- Beam Angles: 25°, 35° or 45°
- Field Angles: 45°, 55° or 65°
- Illuminance (25°): 2,490 lux @ 2 m
- Illuminance (35°): 1,245 lux @ 2 m [no lens installed]
- Illuminance (45°): 806 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 77 Weight: 7.6 lbs (3.5 kg)
- Size: 8.7 x 9.6 x 12 in (220 x 245 x 305 mm)



















EVE P-130 RGB

EVE P-130 RGB is a robust RGB wash light designed for mobile lighting entertainers. Interchangeable magnetic lenses are included to alter the beam to desired angles. EVE P-130 RGB has a sturdy cast aluminum housing that provides extra strength without added weight. D-Fi USB compatibility is also onboard providing the option for wireless master/slave or DMX control. Its fanless design ensures 100% silent operation and the unit's high-frequency LED dimming offers flicker-free operation perfect for video use.

- DMX Channels: 3 or 9
- Light Source: 40 LEDs (13 red, 13 green, 14 blue) 130 W total, (2.5 A), 50,000 hours
- Accessory Holder/Gel Frame Size: 6.25 in (159 mm)
- Beam Angles: 25°, 35° or 45°
- Field Angles: 45°, 55° or 65°
- Illuminance (25°): 2190 lux @ 2 m
- Illuminance (35°): 1100 lux @ 2 m (no lens installed)
- Illuminance (45°): 727 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 7.6 lbs (3.5 kg)
- Size: 8.7 x 9.6 x 12 in (220 x 245 x 305 mm)

















(Sold Separately)





EVE P-100 WW

Warm, bright and even wash is at hand with EVE P-100 WW, a high output warm white (3500 K) wash light designed for mobile and installation applications. It includes interchangeable magnetic lenses to alter the beam to desired angles. EVE P-100 WW features a built-in gel frame holder and handy 61/4-inch accessory slot to hold barn doors. Its fanless design ensures 100% silent operation making it great for quiet applications. High-frequency LED dimming eliminates flicker making EVE P-100WW great for video and broadcast applications. D-Fi USB compatibility is on board for wireless master/slave or DMX control as well as powerCON®-compatible power input/output connections for power linking. Sturdy cast aluminum housing provides extra strength without the weight. EVE P-100WW fits best in the CHS-40 VIP gear bag.

- DMX Channels: 1, 2 or 4
- Light Source: 1 COB LED (warm white) 100 W, (2.7 A), 50,000 hours
- Accessory Holder/Gel Frame Size: 6.25 in (158.75 mm)
- Beam Angle: 25°, 35°, or 53°
- Field Angle: 40°, 50°, or 80°
- Illuminance (25°): 7,920 lux @ 2 m
- Illuminance (35°): 4,340 lux @ 2 m
- Illuminance (53°): 1,469 lux @ 2 m (no lens installed)
- Color Temperature: 3500 K
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 98
- Weight: 7.6 lb (3.5 kg)
- Size: 8.6 x 9.65 x 12 in (220 x 245 x 305 mm)



























SlimPAR Pro W USB

SlimPAR Pro W USB is a low-profile, variable white LED wash light featuring cool white, warm white, and amber LEDs. The fixture's adjustable color temperatures can match existing lighting in addition to providing the perfect temperature for video. Its flicker-free operation also makes it well-suited for on-camera use. D-Fi USB compatibility provides wireless master/slave or DMX control.



- DMX Channels: 3, 4 or 9
- Light Source: 12 LEDs (tri-color CW, WW, A) 6 W (1.4 A), 50,000 hours
- Color Temperature Range: 1,700 to 6,300 K
- · Beam Angle: 17°
- Illuminance: 3,097 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 79
- Weight: 7.1 lb (3.2 kg)
- Size: 10 x 3.9 x 11.4 in (253 x 98 x 290 mm)



















DMX Channels: 4, 5 or 10

• Illuminance: 5,690 lux @ 2 m

Weight: 7.3 lb (3.3 kg)

50.000 hours

Beam Angle: 16°

Optional IRC-6 Remote and D-Fi USB Transceiver

SlimPAR Pro Q USB

SlimPAR Pro Q USB is a high-powered quad-color

(RGBA), low-profile wash light with D-Fi USB compatibility

for wireless control. Dynamic and natural-looking amber

LEDs provide expanded color mixing capabilities. Added

compatible with most 7.5" barn doors.

light spill control is possible because the fixture is



• Light Source: 12 LEDs (quad-color RGBA) 6 W (2 A),

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 10 x 3.9 x 11.4 in (253 x 98 x 290 mm)





















Optional D-Fi USB Transceiver

SlimPAR Pro QZ12 USB

SlimPAR Pro QZ12 USB is a D-Fi USB compatible wash light with motorized zoom and quad-color (RGBA) LEDs designed for mobile lighting entertainers. A built-in gel frame holder and 7½-inch accessory slot to hold optional barn doors are onboard. Flexible control options are possible with 3- and 5-pin DMX connectors and PowerCON®-compatible power input/ output connections provide sturdy and secure power linking. SlimPAR Pro QZ12 USB has built-in dimming curves to simulate halogen filaments. High-frequency LED dimming give flicker-free output ideal for video work and fanless design means 100% silent operation.



SlimPAR Pro H USB is designed for any application

that calls for a high-power, low-profile LED wash

light with precise colors. Features include D-Fi USB

compatibility for wireless control. SlimPAR Pro H USB

has no moving parts and is flicker-free so it is ideal

for quiet and on-camera applications. Generate a broad

spectrum of colors and achieve natural-looking color

temperatures with 6-in-1 LED technology.

Available in black or white



Optional IRC-6 Remote and D-Fi USB Transceiver

SlimPAR Pro H USB

- Light Source: 12 LEDs (hex-color RGBAW+UV) 10 W (2.4 A), 50,000 hours
- Beam Angle: 24°
- Illuminance: 3,218 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 7.2 lb (3.3 kg)
- Size: 10 x 3.9 x 11.4 in (253 x 98 x 290 mm)



- DMX Channels: 5, 6 or 11
- Light Source: 12 LEDs (quad-color RGBA) 10 W (2.7 A), 50.000 hours
- Zoom Angle (beam to field): 10° to 50°
- Illuminance (10°): 16,070 lux @ 2 m
- Illuminance (50°): 1,216 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 10.1 lb (4.6 kg)
- Size: 9.2 x 10.6 x 12.5 in (234 x 269 x 318 mm)
















Control right from your phone or tablet straight to your lights! No additional hardware needed!

- Bluetooth compatibility: V4.2 (or greater)
- Minimum Operating System (Android): Lollipop (V5)
- Minimum Operating System (Apple): iOS 8

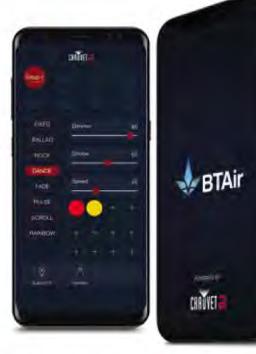

*Patent Pending





"The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG. Inc. and any use of such marks by Chauvet & Sons. LLC is under license. Other trademarks and trade names are those of their respective owners."



Bluetooth® Compatible Fixtures





4BAR LT Quad BT (page 26)







SlimPAR Q12 BT (page 27)



NEW



SlimPAR T12 BT (page 27)

EZLink Strip Q6 BT (page 25)



COLORband T3 BT (page 27)

EZLink FS BT (page 25)



CHAUVET DJ makes creating exhilarating lighting easy with EZLink Par Q4 BT. This battery-powered quadcolor (RGBA) LED Par fixture has Bluetooth® wireless technology built in, allowing you to control EZLink Par Q4 BT with the free BTAir app from any smartphone or tablet. No additional hardware needed! Genuine amber LEDs included with quad-color lights like EZLink Par Q4 BT provide richly vibrant and warm color mixing or natural-looking color temperatures. Other convenient control options include the IRC-6 remote and soundactivated or automated programs. EZLink Par Q4 BT fits best in the CHS-40 VIP Gear Bag.



- DMX Channels: 4 or 8
- Light Source: 4 LEDs (quad-color RGBA) 3 W, (952 mA), 50,000 hours
- Beam Angle: 15°
- Illuminance: 2,826 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single color): up to 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (25.7 m)
- Weight: 2.8 lb (1.3 kg)
- Size: 5.7 x 5.7 x 5.6 in (145 x 145 x 143 mm)
- Bluetooth Version: 4.2



















Weight: 3.6 lb (1.7 kg)

Bluetooth Version: 4.2

DMX Channels: 4 or 8

Illuminance: 1.268 lux @ 2 m

50.000 hours

Beam Angle: 19°

EZLink Par 06 BT



Maximum Run Time (all on): up to 8 hours

Max Unobstructed Distance: 150 ft (25.7 m)

• Size: 8 x 9.6 x 3.4 in (206.6 x 244 x 86 mm)

Maximum Run Time (single color): up to 20 hours

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)



Light Source: 6 LEDs (quad-color RGBA) 3 W. (900mA).







Bluetooth

BTAir™ Compatible **FC**

Battery-powered lighting just got even more convenient

with EZLink Par Q6 BT, a 100% TRUE wireless battery-

operated Par with built-in Bluetooth® wireless technology.

Harness the color-mixing power of this versatile fixture

with six quad-color (RGBA) LEDS, including genuine

amber, right from any smartphone or tablet—no additional

hardware needed! Imagine the ability to wash smaller

event spaces with dynamic lighting displays, using the

free BTAir smartphone app. EZLink Par Q6 BT allows

you convenient wireless non-DMX control using the

IRC-6 remote or through sound-activated and automated

programs. Fits best in the CHS-40 VIP Gear Bag.



effects. Punchy amber LEDs allow for natural-looking

color temperatures and richly vibrant and warm color-

mixing. Easily set static colors or automated programs

with the optional IRC-6 remote, or generate eye-catching

effects with sound-activated and automated programs.



EZLink FS BT

Trigger lighting scenes without ever taking your hands off your instruments or mixers! EZLink FS BT is a convenient battery-powered footswitch with built-in Bluetooth® wireless technology that provides hands-free triggering of lighting scenes exclusively in the BTAir app. Quickly access previous scene, next scene and blackout. The rechargeable lithium-ion battery eliminates constant battery replacement.





- Light Source: 6 LEDs (quad-color RGBA) 3 W, (1 A), 50,000 hours
- Beam Angle: 33°
- Illuminance: 325 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single color): up to 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (25.7 m)
- Weight: 6.6 lb (3.0 kg)
- Size: 19.7 x 4.2 x 5.4 in (500 x 108 x 139 mm)
- Bluetooth Version: 4.2









Maximum Run Time: up to 8 hours

- Recharge Time: 2 hours
- Input Voltage: 5 VDC, 1 A (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 1.2 lb (0.6 kg)
- Size: 12 x 5.5 x 1.5 in (310 x 140 x 37 mm)







4BAR LT Quad BT

The rich, warm color-mixing power of amber LEDs comes to one of the most convenient pack-n-go wash lighting systems anywhere. This quad-color (RGBA) fixture comes equipped with built-in Bluetooth® wireless technology so you can light easier right from your phone or tablet with the BTAir app (patent pending). In addition, D-Fi USB compatibility for wireless master/ slave or DMX control is also on board. This complete wash lighting solution has 4 individually adjustable heads to achieve total room or stage coverage.

- DMX Channels: 4, 6 or 19
- Light Source: 12 LEDs (quad-color RGBA) 4 W, (2 A), 50,000 hours
- Beam Angle: 12°
- Illuminance: 2,162 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 7.2 lb (3.3 kg)
- Size: 36.1 x 3.7 x 10.8 in (918.1 x 95 x 274.3 mm)
- Bluetooth Version: 4.2
- Max Unobstructed Distance: 150 ft (25.7 m)





















Bluetooth

SlimPAR 012 BT

technology that allows you to control the light from any smart phone or Bluetooth® wireless technology. Download the BTAir app for free from your wireless technology. With the BTAir app, COLORband T3 BT can be controlled tablet without the need for any additional hardware. SlimPAR Q12 BT favorite app store and enjoy the ultra-convenient ease of controlling SlimPAR remotely from any smart phone or tablet without any additional hardware. features 12 quad-color (RGBA) LEDs that generate a broad spectrum of T12 BT right from your smart phone or tablet. SlimPAR T12 BT has 12 tricolors and achieve natural-looking color temperatures. Easily set static color (RGB) LEDs and its compact design easily fits inside sticks of truss BT has 12 tri-colored (RGB) LEDs and 3 zones of control to create amazing colors or automated programs with the optional IRC-6 remote or create eye- making it perfect for truss warming. An optional IRC-6 remote can also be automated effects. Access built-in automated programs via optional IRC-6 catching effects with sound-activated and automated programs. Download used for control as well as DMX, automated and sound-activated programs. Remote, master/slave or DMX. the BTAir app for free from your favorite online app store.





- Light Source: 12 LEDs (quad-color RGBA) 3.5 W, (1.5 A), 50,000 hours
- Beam Angle: 18°
- Illuminance: 2.893 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

ACTIVATED

SOUND

ACTIVATED

SOUND

ACTIVATED

SOUND

SOUN

- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 3.3 lb (1.5 kg)
- Size: 11 x 10.8 x 2.9 in (279 x 275 x 74 mm)
- Bluetooth Version: 4.2

SlimPAR T12 BT

COLORband T3 BT


SlimPAR Q12 BT is a compact wash light with built-in Bluetooth® wireless SlimPAR T12 BT makes remote light control easy with its on-board COLORband T3 BT is a compact linear wash light with built-in Bluetooth®











- DMX Channels: 3 or 7
- Light Source: 12 LEDs (tri-color RGB) 2.5 W, (1 A), 50,000 hours
- Beam Angle: 14°
- Illuminance: 5.340 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

SOUND ACTIVATED OHMABLE LINKING OF CHIS-40

- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 2.6 lb (1.2 kg)
- Size: 10.4 x 8.4 x 3 in (264 x 214 x 76.9 mm)
- Bluetooth Version: 4.2

- DMX Channels: 3, 5 or 13
- Light Source: 12 LEDs (tri-color RGB), 2.5 W (1 A) 50.000 hours
- Beam Angle: 42°
- Illuminance: 548 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 6.6 lb (3 kg)
- Size: 39.3 x 2 x 6.2 in (1000 x 51 x 157 mm)
- Bluetooth Version: 4.2















IRC-6 Remote Included

EZpar 64 RGBA

EZpar 64 RGBA is a battery powered wash light designed to speed setup and free the mobile entertainer from the hassle of running cables. Its rechargeable lithium-ion battery lasts up to 20 hours on a single charge. EZpar 64 RGBA powers 180 red, green, blue and amber LEDs to deliver stunning colors. Built-in automated and sound-activated programs are accessible using the included IRC-6 remote and in VIP Gear Bag.



- DMX Channels: 4 or 8
- Light Source: 180 LEDs (39 red, 39 green, 51 blue, 51 amber) 0.25 W (20 mA), 100,000 hours
- Beam Angle: 14°
- Illuminance: 1.325 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single color): up to 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.2 lb (1.9 kg)
- Size: 10.8 x 10.8 x 2.6 in (276 x 275 x 66 mm)





IRC-6 Remote Included

EZpar 56

EZpar 56 is a battery powered wash light designed to speed up setup by freeing the mobile entertainer from the hassle of running cables. The rechargeable lithium-ion battery lasts up to 20 hours on a single charge and powers all 108 LEDs (36 red, 36 green, 36 blue) to deliver stunning colors. Built-in automated and sound-activated programs are accessible using the included IRC-6 remote and in DMX or master/slave DMX or master/slave mode. Fits best in the CHS-25 mode. Compact, it easily fits into truss sticks. A built-in battery life indicator allows you to easily keep tabs on the remaining charge. Fits best in the optional CHS-25 VIP Gear Bag.



- DMX Channels: 3 or 7
- Light Source: 108 LEDs (36 red, 36 green, 36 blue) 0.25 W (20 mA), 100,000 hours
- Beam Angle: 14°
- Illuminance: 1.050 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single color): up to 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.9 lb (1.3 kg)
- Size: 9.5 x 8.6 x 2.5 in (242 x 219 x 64 mm)











Weight: 3.7 lb (1.7 kg)

DMX Channels: 3 or 8

Illuminance: 1.440 lux @ 2 m

50.000 hours

Beam Angle: 19°

IRC-6 Remote Included

EZpar T6 USB



• Size: 7.1 x 4.1 x 9.1 in (180 x 105 x 231 mm)

Maximum Run Time (all on): up to 8 hours

Light Source: 6 LEDs (tri-color RGB) 3 W. (820 mA).

Maximum Run Time (single color): up to 20 hours

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)







IRC-6 Remote Included

Optional D-Fi USB Transceiver

EZpar T6 USB is a battery operated, tri-color RGB LED

wash light. D-Fi USB compatible for wireless master/

slave or DMX control. Its rechargeable, lithium battery

lasts up to 20 hours from a single charge and you can

easily check the battery status with the built-in battery

life indicator. Convenient access to RGB color mixing

and static colors is available with or without DMX.

Built-in automated programs via the IRC-6 remote or

master/slave mode makes control easy.

EZwedge Tri

EZwedge Tri is a battery operated, tri-color LED wash light that fits perfectly inside Trusst Goal Post and Arch Kit truss systems. The rechargeable, lithium-ion battery lasts up to 20 hours from a single charge, and you can easily check the battery status with the built-in battery life indicator. EZwedge Tri attaches to 35-mm truss without the need for a bracket, using M10 or M12 threaded rig points. Its flicker-free operation is suitable for on-camera use and it provides smooth dimming with built-in dimming curves.



- DMX Channels: 3 or 8
- Light Source: 3 LEDs (tri-color RGB) 3 W (1,050 mA), 50.000 hours
- Beam Angle: 16°
- Illuminance: 1.066 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single color): up to 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.9 lb (1.3 kg)
- Size: 4.3 x 4.3 x 5.4 in (108 x 108 x 136 mm)













IRC-6 Remote Included

EZGobo is a battery powered LED gobo projector that comes with 10 wedding-ready gobos; plus it accepts custom 35 mm color slide gobos, or create and print easily on transparency film. The long-lasting, rechargeable lithium battery eliminates the need for power cords. EZGobo also includes a magnet, scissor clamps and a threaded hole for multiple mounting options. It comes with an IRC-6 remote and the wireless on/off dimmable operation makes it very convenient.



Clamp it on pipe and truss



Magnetic base adheres to most metal surfaces and drop ceiling supports



Scissor clip attaches to drop ceiling supports





Optional IRC-6 Remote and D-Fi USB Transceiver

Gobo Zoom USB

DMX Channels: 2

Weight: 4.6 lb (2.1 kg)

Zoom Angle (manual): 17° to 28°

Illuminance: (17°) 3,075 lux @ 2 m

Illuminance: (28°) 1,121 lux @ 2 m





10 Wedding-Ready Gobos Included

Light Source: 1 LED (cool white) 25 W (6 A), 50,000 hours

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 9.4 x 4.9 x 9.6 in (238 x 124 x 244 mm)

Gobo Size: 25.74 mm outside, 19.38 mm max. image, 1 mm max. thickness



Gobo Zoom USB is a super compact gobo projector with a manual zoom, and wireless connectivity in master/slave

and DMX mode, thanks to its embedded D-Fi USB compatibility. Gobo Zoom USB includes 10 wedding-ready gobos

and can be controlled without DMX using the optional IRC-6 remote. Gobo Zoom USB accepts custom gobos,

including patterns and messages easily printed on transparency film. Fits best in the CHS-40 VIP Gear Bag.

Control gobo rotation with built-in display or optional



- Zoom Angle: 16° to 31°
- Gobo Size: 25.8 mm outside, 18.6 mm image, 0.2 mm max. thickness
- Illuminance: (16°) 669 lux @ 2 m
- Illuminance: (31°) 207 lux @ 2 m
- Input Voltage: 8.4 VDC, 1 A (external power supply: 100 to 240VAC, 50/60 Hz)
- Weight: 2.2 lb (1 kg)
- Size: 6.6 x 4.3 x 6.7 in (167 x 110 x 170 mm)












10 Wedding-Ready Gobos Included















D-Fi USB Transceiver

COREpar 80 USB

COREpar 80 USB produces a full spectrum of light with the unsurpassed color mixing of COB (chip-onboard) technology. Includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flicker-free performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility. Point-and-shoot operation of static colors and automated programs is also possible with the optional IRC-6 remote control

- DMX Channels: 3 or 8
- Light Source: 1 COB LED (tri-color RGB) 80 W (2 A), 50.000 hours
- Beam Angle: 70° (without lens)
- Beam Angle: 25° (with lens)
- Illuminance: 405 lux @ 2 m (without lens)
- Illuminance: 2,143 lux @ 2 m (with lens)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.4 lb (2 kg)
- Size: 7.9 x 5.6 x 10 in (200 x 143 x 253 mm)















D-Fi USB Transceiver

COREpar 40 USB

COREpar 40 USB produces a full spectrum of light with the unsurpassed color mixing of COB (chip-onboard) technology. Includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flicker-free performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility. Point-and-shoot operation of static colors and automated programs is also possible with the optional IRC-6 remote control. The unit's robust sit-flat housing features power and DMX outlets on the side.

- DMX Channels: 3 or 8
- Light Source: 1 COB LED (tri-color RGB) 40 W (2 A), 50,000 hours
- Beam Angle: 40° (without lens)
- Beam Angle: 20° (with lens)
- Illuminance: 243 lux @ 2 m (without lens)
- Illuminance: 1,660 lux @ 2 m (with lens)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.5 lb (1.6 kg)
- Size: 5.2 x 7.4 x 9.5 in (132 x 189 x 242 mm)











Optional IRC-6 Remote and D-Fi USB Transceiver

COREpar UV USB

COREpar UV USB is a compact UV wash with COB (chip-on-board) LED technology, offering D-Fi USB compatibility for wireless master/slave or DMX control. It includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flicker-free performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility.

- DMX Channels: 1 or 5
- Light Source: 1 COB LED (UV) 70 W (1.5 A), 50,000 hours
- Wavelength: 390 to 400 nm
- Beam Angle: 100° (without lens)
- Beam Angle: 50° (with lens)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.6 lb (2.1 kg)
- Size: 5.5 x 7.9 x 10 in (139 x 200 x 253 mm)














- DMX Channels: 3, 5, 9, 27, or 31
- Light Source: 9 COB LEDs (tri-color RGB) 9 W (1.5 A), 50.000 hours
- Beam Angle: 47°
- Illuminance: 1,025 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 13.7 lb (6.2 kg)
- Size: 6.1 x 13.5 x 13.5 in (156 x 344 x 344 mm)

















D-Fi USB Transceiver

COLORband PiX USB

COLORband PiX USB is a linear LED wash light that functions as a pixel mapping effect, blinder or wall washer. It features D-Fi USB compatibility for wireless master/slave or DMX control. Pixel mapping functions mean you can create amazing animations and video effects. Access to multiple pre-built programs is available with or without DMX. The fixture's high-power, tri-color LEDs nearly eliminate multicolor shadows and its high-frequency LED dimming lets you achieve flicker-free operation suitable for video applications. Save time running cables and power cords by power linking multiple units. COLORband PiX USB is ideal for quiet applications due to its silent operation and no moving parts. Control of static colors and automated programs is easy with the optional IRC-6 remote. Fits best in the optional CHS-60 VIP Gear Bag. Also available in outdoor-rated version

(See page 19)

- DMX Channels: 3, 4, 6, 7, 8, 9, 12, 18, 36 or 41
- Light Source: 12 LEDs (tri-color RGB) 3 W (1.000 mA). 50.000 hours
- Beam Angle: 27°
- Illuminance: 2,245 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4 lb (1.8 kg)
- Size: 38.9 x 1.9 x 6.2 in (987 x 49 x 157 mm)





















IRC-6 remote.



COLORband PiX-M USB, a moving LED strip light, is

a versatile wall-wash light that can create dynamic

sweeping, chase, animation and blinder effects thanks

to its rotating base, pixel-mapping capabilities, and

the ability to control each of its 10 LEDs separately.

Its motors allow you to angle the light where it's

needed. COLORband Pix-M USB features D-Fi USB

compatibility for wireless master/slave or DMX control

but you can also access dramatic, pre-built automated

programs with or without DMX. Wireless, non-DMX

operation is also available with the optional



COLORhand PiX-M USB








ptional IRC-6 Remote and

COLORband T3 USB is a full-size LED strip light that functions as a chase effect, blinder or wall washer. It features three zones of control to create amazing chasing effects. Control is easy with convenient access to multiple pre-programs with or without DMX, and sound-activated programs. The unit is D-Fi USB compatible for wireless master/slave or DMX control. COLORband T3 USB includes multiple DMX personalities for a wide variety of programming styles and its silent operation makes it ideal for quiet applications. Fits best in the optional CHS-60 VIP Gear Bag.





- Tilt: 245°
- Light Source: 10 LEDs (tri-color RGB) 9 W. (2A). 50.000 hours
- Beam Angle: 20°
- Illuminance: 6.120 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 9.7 lb (4.4 kg)
- Size: 30.9 x 2.6 x 4.8 in (785 x 67 x 123 mm)













Weight: 6 lb (2.7 kg)

50 000 hours

Beam Angle: 27°

DMX Channels: 3, 6, 8, 9 or 14

Illuminance: 1,760 lux @ 2 m











Optional IRC-6 Remote and

D-Fi USB Transceiver

COLORband H9 USB

optional CHS-60 VIP Gear Bag.

DMX Channels: 6, 9, 11, 18 or 23

(2.3 A), 50,000 hours

Weight: 7.1 lb (3.2 kg)

Illuminance: 2,254 lux @ 2 m

Beam Angle: 29°

COLORband H9 USB is a full-size hex-color LED strip

light that functions as a chase effect, blinder or wall

washer. It is D-Fi USB compatible for wireless master/

slave or DMX control. Its 6-in-1 LED technology

generates a broad spectrum of colors and natural-

looking color temperatures. Three zones of control

create amazing chase effects and you can access

multiple pre-built programs with or without DMX.

Sound-activated and automated programs can be

accessed with the optional IRC-6 remote, COLORband

H9 USB is ideal for guiet applications due to its silent

operation and no moving parts. Easily transports in the



Size: 39.4 x 2.2 x 6.6 in (1000 x 56 x 168 mm)

Light Source: 9 LEDs (hex-color RGBAW+UV) 10 W

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)





























• Size: 38.9 x 1.9 x 6.2 in (987 x 49 x 157.3 mm)

Light Source: 12 LEDs (tri-color RGB) 3W (700 mA).

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)











COLORrail IRC

COLORrail is a linear wash and effect light fitted with 320 RGB LEDs and featuring infrared technology. Create your own looks with eight sections of DMX control, or generate eye-catching chase and runway effects with built-in automated and sound-activated programs. Thanks to tightly packed and evenly distributed LEDs, color mixing and wall washing occur almost instantly. For wireless (non-DMX) control, use it with the optional IRC-6 remote. Fits best in the CHS-60 VIP Gear Bag.



- DMX Channels: 2, 3, 4, 7, 14, or 26
- Light Source: 320 LEDs (128 red, 96 green, 96 blue) 0.25 W (20 mA), 100,000 hours
- Beam Angle: 28°
- Illuminance: 1,124 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 6.2 lb (2.8 kg)
- Size: 39.4 x 2.8 x 5.8 in (1003 x 71 x 147 mm)















DMX Channels: 4

Beam Angle: 53° x 27°

Weight: 4.4 lb (2 kg)

Illuminance: 1,104 lux @ 2 m

0.25 W (20 mA), 100,000 hours

Size: 38 x 2.5 x 6 in (965 x 64 x 152 mm)

Optional IRC-6 Remote

COLORstrip



Light Source: 384 LEDs (128 red, 128 green, 128 blue)

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)







COLORstrip Mini is a 19-inch long, 4 channel LED

linear wash light. Static colors and RGB color mixing

can be achieved with or without a DMX controller.

Blackout, static, dimmer and strobe are included.

Additional features include built-in automated and

sound-activated programs via master/slave or DMX.

Up to 31 units can be linked via master/slave for a

color-changing runway effect. Fits best in the CHS-60

COLORstrip Mini

VIP Gear Bag.

DMX Channels: 4

Beam Angle: 37° x 33°

Illuminance: 1,192 lux @ 2 m

COLORstrip Foot Controller

COLORstrip is a compact, linear wash light designed

for uplighting applications and eye candy effects.

It features static colors as well as blackout, dimmer

and strobe effects. Link multiple fixtures for dynamic

runway chases. Control both with the (optional)

COLORstrip Foot Controller (LED-FS1), which provides

hands-free control with 4 pedals that trigger static

colors, chase programs, speed of strobe and blackout.

Fits best in the CHS-60 VIP Gear Bag.







COLORpalette

COLORpalette is a powerful bank system fitted with 288 RGB LEDs to emit colorful effects during any mobile application. Increase design options with full control of blackout, static and dimmer effects, color fading and full color mixing capabilities in up to 8 sections. It includes built-in, automated and soundactivated programs for plug-and-play operation, or you can create customized looks using 3, 6, 9, 15 or 27 channels of DMX control.



- DMX Channels: 3, 6, 9, 15 or 27
- Light Source: 288 LEDs (96 red, 96 green, 96 blue) 0.25 W (20 mA), 100,000 hours

• Size: 16.7 x 9.8 x 7 in (425 x 248 x 178 mm)

- Beam Angle: 31° x 29°
- Illuminance: 1,813 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.3 lb (1.5 kg) Weight: 6.2 lb (2.8 kg)
- Size: 19 x 2 x 6.1 in (482 x 52 x 155 mm)

0.25 W (20 mA), 100,000 hours

Light Source: 192 LEDs (64 red, 64 green, 64 blue)















• Size: 15.6 x 2.2 x 10.2 in (394 x 74 x 259 mm)

Light Source: 18 LEDs (tri-color RGB) 3 W (1,050 mA).

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

DMX Channels: 3, 5, 9 or 13

Illuminance: 4,120 lux @ 2 m

Weight: 7.9 lb (3.6 kg)

50.000 hours

Beam Angle: 17°

Optional IRC-6 Remote and

D-Fi USB Transceiver

Slimbank T18 USB

SlimBANK T18 USB is a powerful wash light with

18 tri-color (RGB) LEDs that achieve smooth color

mixing. Adjustable barn doors help direct and focus

the light. Convenient control options include auto

and sound-activation programs as well as DMX. USB

compatibility provides fast and easy wireless options.











































Optional IRC-6 Remote and D-Fi USB Transceiver

SlimPAR Q6 USB

SlimPAR H6 USB is a low-profile RGBAW+UV LED SlimPAR Q6 USB is a low-profile, high-output quadwash light with D-Fi USB compatibility for wireless color (RGBA) LED wash light that features 6 LEDs master/slave or DMX control. It also works in soundand D-Fi USB compatibility for instant wireless active mode. Built-in dimming curves provide smooth connectivity. It is controllable via master/slave, DMX, LED fading, and the 6-in-1 LED technology generates standalone modes or the optional point-and-shoot IRCa broad spectrum of natural-looking colors. Precise 6 remote. It also features multiple user-configurable settings. SlimPAR Q6 USB creates natural-looking colors can also be created with the built-in LED display. Point-and-shoot operation of static colors and color temperatures thanks to punchy amber LEDs. automated programs is possible with the optional IRC-6 Its flicker free operation makes it well suited for video remote. Compact designed, it works as a truss warmer. productions. With no moving parts, it is ideal for applications where silence is essential





Optional IRC-6 Remote and

Slimpar ouv 12 USB

SlimPAR QUV 12 USB is a low-profile, high-output,

quad-color (RGB+UV) LED wash light that is D-Fi USB

compatible to allow wireless master/slave or DMX

control. Punchy UV LEDs generate a broad spectrum

of intense colors. Static colors and automated

programs can be controlled easily with the optional

IRC-6 remote. Multiple user-configurable settings are

available to increase standalone versatility. Multiple

units can be power linked to save time running cables

and extension cords. With no moving parts, this silent,

D-Fi USB Transceiver

- Light Source: 12 LEDs (quad-color RGB+UV) 4 W (1.4 A), 50,000 hours
- Beam Angle: 15°
- Illuminance: 2,377 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.6 lb (2.1 kg)
- Size: 9.7 x 3.6 x 11.5 in (247 x 92 x 293 mm)





- Beam Angle: 23°
- Illuminance: 747 lux @ 2 m Illuminance: 2,684 lux @ 2 m Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Optional IRC-6 Remote and

D-Fi USB Transceiver

SlimPAR H6 USB

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Weight: 3.4 lb (1.6 kg)
 - Weight: 3.4 lb (1.6 kg)
 - - Size: 8.3 x 3.6 x 9.6 in (212 x 92 x 244 mm)



DMX Channels: 4 or 9

50.000 hours

Beam Angle: 19°



Light Source: 6 LEDs (quad-color RGBA) 4 W (0.9 A),













SlimPAR Q12 USB

SlimPAR Q12 USB is a low-profile, high-output quadcolor (RGBA) LED wash light with D-Fi USB for instant wireless connectivity. It is controllable via master/slave, DMX, standalone modes or the optional point-and-shoot IRC-6 remote. It also features multiple user-configurable settings. SlimPAR Q12 USB creates natural-looking color temperatures thanks to punchy amber LEDs. Its flicker free operation makes it well suited for video productions. With no moving parts, it is ideal for applications where silence is essential. Multiple units can be power linked to save time running cables and extension cords. Fits best in the CHS-30 VIP Gear Bag. Also sold in packs, see below.

- DMX Channels: 4 or 9
- Light Source: 12 LEDs (quad-color RGBA) 4 W (0.8 A), 50,000 hours
- Beam Angle: 17°
- Illuminance: 4,960 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.9 lb (2.2 kg)
- Size: 9.7 x 3.6 x 11.5 in (247 x 92 x 293 mm)

















Includes 1 Carry Bag, 4 SlimPAR Q12 USB and 3 DMX Cables



SlimPAR T12 USB

SlimPAR T12 USB is a high output tri-color (RGB) LED wash light with D-Fi USB compatibility to allow instant wireless control in DMX or master/slave mode. Tricolor LEDs virtually eliminate distractive multicolored shadows. Its even, flicker-free output makes it ideal for front light applications and use in video productions. The optional IRC-6 remote can be used to access automated programs and control static colors. Compact enough to fit inside truss sticks, SlimPAR T12 USB is best transported in the CHS-30 VIP Gear Bag. Also sold in packs, see below.

- DMX Channels: 3 or 8
- Light Source: 12 LEDs (tri-color RGB) 3 W (1 A), 50.000 hours
- Beam Angle: 15°
- Illuminance: 3,801 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4 lb (1.8 kg)
- Size: 8.9 x 3.3 x 9.9 in (227 x 84 x 252 mm)



SlimPACK T12 USB



and 3 DMX Cables





SlimPAR T6 USB

SlimPAR T6 USB is a low profile, high output tri-color (RGB) LED wash light with D-Fi USB compatibility for wireless master/slave or DMX control. As versatile as it is dependable, this compact fixture is an ideal truss warmer. Because of its even output, it's also an excellent front light, and its flicker-free output makes it an ideal light for broadcast/video applications. Tri-color LEDs virtually eliminate multicolored shadows. SlimPAR T6 USB has multiple user-configurable settings, and built-in automated programs are easily accessed via master/slave or the optional IRC-6 remote. Multiple units can be power linked. The CHS-30 VIP Gear Bag is recommended for transport.



- DMX Channels: 3 or 8
- Light Source: 6 LEDs (tri-color RGB) 3 W (800 mA), 50.000 hours
- Beam Angle: 15°
- Illuminance: 1,621 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.4 lb (1.1 kg)
- Size: 7.1 x 3.3 x 8.9 in (181 x 84 x 226 mm)













DMX Channels: 3 or 7

Weight: 2.9 lb(1.3 kg)

Beam Angle: 14°

SlimPAR 64

in the CHS-25 VIP Gear Bag.

SlimPAR 64 houses 180 red, green and blue LEDs in

a slim casing that fits almost anywhere. This efficient

wash light is controllable in 3 or 7-channel DMX mode.

Activate pulse effects at variable speed or built-in

automated and sound-activated programs. For added

convenience, it also offers static colors and RGB color

mixing with or without DMX. Power linking multiple

units greatly simplifies setup and tear down. Fits best



0.25 W (20 mA), 100,000 hours

Illuminance: 1,241 lux @ 2 m

• Light Source: 180 LEDs (60 red, 60 green, 60 blue)

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 9.7 x 11.1 x 2.5 in (246 x 282 x 64 mm)









SlimPAR 64 RGBA

SlimPAR 64 RGBA houses 180 red, green, blue and amber LEDs in a discreet, ultra-compact casing. It offers static colors and color mixing with or without DMX. Use built-in automated and sound-activated programs as well as pulse effects at variable speed for a show on the fly. Or create your own looks using a 4- or 8-channel DMX mode. Fits best in the CHS-25 VIP Gear Bag.



- DMX Channels: 4 or 8
- Light Source: 180 LEDs (39 red, 39 green, 51 blue, 51 amber) 0.25 W (20 mA), 100.000 hours
- Beam Angle: 14°
- Illuminance: 1,325 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.8 lb (1.3 kg)
- Size: 10.9 x 10.8 x 2.6 in (276 x 275 x 66 mm)













Available in black or white

SlimPAR 56

SlimPAR 56 is a LED wash light in a sleek white or black housing. Powered by 108 red, green and blue LEDs, it blends into any décor with ease. Customize light shows in 3- or 7-channel DMX mode. Fits best in the CHS-SP4 VIP Gear Bag. Also sold in packs, see below.

- DMX Channels: 3 or 7
- Light Source: 108 LEDs (36 red, 36 green, 36 blue) 0.25 W (20 mA), 100.000 hours
- Beam Angle: 14°
- Illuminance: 876 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.6 lb (1.2 kg)
- Size: 9.5 x 8.8 x 2.2 in (241 x 224 x 56 mm)













Includes 1 Carry Bag, 4 SlimPAR 56 and 3 DMX Cables



Wedge Tri

Wedge Tri is a triangle-shaped, DMX-controllable LED wash light designed to fit inside triangular truss systems from most manufacturers. It fits perfectly inside Trusst Goal Post and Arch Kit truss systems and easily attaches to 35 mm truss, using M10 or M12 threaded rig points. Control static colors and automated programs with the included IRC-6 remote, or use the built-in digital display to easily create any color without DMX. Also available in battery operated wireless version (See page 30)



- DMX Channels: 3 or 8
- Light Source: 3 LEDs (tri-color RGB) 3 W (1,050 mA), 50,000 hours
- Beam Angle: 16°
- Illuminance: 1,066 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 1.3 lb (0.6 kg)
- Size: 4.3 x 4.3 x 4.1 in (108 x 108 x 104 mm)

























EZpin Pack 4

Accent lighting and pin spotting with battery-powered EZpin Pack 4 makes lighting centerpieces, cakes, and other event space focal-points easier than ever. EZpin Pack 4 bundles four EZpin fixtures and one IRC-6 remote into an easily transportable VIP gear bag; perfect for mobile entertainers and event producers. Each light has a magnetic base that affixes to most metal surfaces, eliminating the need for clamps. No metal surfaces? No problem! Easily attach the lights to drop ceiling supports or air wall frames using CHAUVET DJ Scissor Clip. EZpin Pack 4 includes variable white gels to achieve versatile lighting looks. You can even control the units remotely with the included IRC-6 remote.



- Light Source: 1 LED (cool white) 2 W, (725 mA), 50,000 hours life expectancy
- Beam Angle: 3°
- Field Angle: 6°
- Illuminance: 3.112 lux @ 2 m
- Maximum Run Time: up to 10 hours
- Recharge Time: 7 hours
- Color Temperature: 7100 K
- Included gels: 2700 K and 4000 K
- Input Voltage: 5 VDC, 2.4 A (external power supply: 100 to 240 VAC, 50/60 Hz)
- Power and Current: 199 W, 2.8 A @ 120 V, 60 Hz
- Power and Current: 194 W. 1.6 A @ 230 V. 50 Hz
- Bracket Mounting Hole: M10
- Weight: 0.6 lb (0.3 kg)
- Size: 7.4 x 2.7 x 2.1 in (189 x 70 x 53 mm)

2 variable white gels Included: 2700 K and 4000 K





IRC-6 Remote Included

EZBar is a battery-powered bar with three independent warm white pin spots designed to accent event space elements. Each of the three lights can be manually adjusted to different angles to light a variety of subjects. The rechargeable lithium battery allows the fixture to be placed anywhere and provides up to ten hours of run time. The bar features a strong magnet for flexible mounting options to most metal surfaces. An optional wireless IRC-6 remote can set the dimmer and turn the fixture on or off. EZBar also includes wide-angle diffusers for short-throw applications.



- Light Source: 3 LEDs (warm white) 5 W, (1.3 A), 50,000 hours life expectancy
- Beam Angle: 5° (per pod)
- Field Angle: 10° (per pod)
- Illuminance: 3,900 lux @ 2 m (per pod)
- Maximum Run Time (all on): up to 8 hours
- Recharge Time: 7.5 hours
- Color Temperature: 4000 K
- Input Voltage: 15 VDC, 1.6 A (external power supply: 100 to 240 VAC, 50/60 Hz)
- Power and Current: 19 W, 0.3 A @ 120 V, 60 Hz
- Power and Current: 18 W, 0.2 A @ 230 V, 50 Hz
- Threaded Clamp Hole: M10
- Weight: 4.2 lb (1.9 kg)
- Size: 14 x 5 x 4 in (358 x 127 x 106 mm)

10° and 25° diffusers Included







LED Pinspot 3

LED Pinspot 3 is a palm-sized pinspot that can be turned on/off and dimmed from a distance via the optional IRC-6 remote. A pack of five gels is included to let you easily change colors.



- Light Source: 1 LED (cool white) 5 W (1.6 A), 50,000 hours
- Beam Angle: 8°
- Illuminance: 3,558 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 1.1 lb (0.5 kg)
- Size: 4.6 x 4.1 x 2.7 in (116.5 x 104 x 68 mm)

Color Gels Included





LED Pinspot 2

LED Pinspot 2 includes two front focal lens options to produce hard-edged beams for a variety of applications. It weighs less than a pound and is powered by a 3 W white LED. The auto switching power supply allows the fixture to adapt to the voltage provided, ranging from 100 V to 240 V.



- Light Source: 1 LED (cool white) 3 W (700 mA). 50.000 hours
- Beam Angle: 6° (installed), 9° (included) Illuminance (6°): 4.120 lux @ 2 m
- Illuminance (9°): 1,335 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 0.9 lb (0.4 kg)
- Size: 7.6 x 4.1 x 5.8 in (193 x 105 x 148 mm)

Color Gels Included





LED Followspot 75ST

LED Followspot 75ST sheds the spotlight precisely where it needs to be with a focused hard-edge beam and smooth LED dimming. Equipped with a 75 W LED, it features a single gobo slot to project crisp patterns and can also perform electronic strobe effects. It is easy to set up and tear down, and comes with a free tripod. It's the perfect choice as an entry-level followspot for stages, school functions and events where focus needs to be on a speaker or guest of honor.

- DMX Channels: 3
- Light Source: 1 LED (cool white) 75 W (18 A) 50.000 hours
- Zoom Angle (manual): 14° to 20°
- Gobo Size: 23.7 mm outside, 21.3 mm image, 1 mm max. thickness
- Colors: 7 + white
- Illuminance (14°): 8,140 lux @ 2m
- Illuminance (20°): 4,650 lux @ 2 m
- Input Voltage: 120/230 VAC, 50/60 Hz (switchable)
- Weight: 13.2 lb (6 kg)
- Size: 22 x 10.9 x 11.5 in (560 x 276 x 292 mm)





LED Followspot 120ST

LED Followspot 120ST is a portable, LED followspot that emits a tight beam powered by a bright 120 W LED to highlight actors at far distances. Built-in CTO filter lowers color temperature to match tungsten lamps. Control options include DMX and manual modes and you can simplify fading with smooth LED dimming. Focus the light where it is needed using the mechanical iris to reduce the beam's diameter and deliver silent operation with fast electronic strobe and no moving parts. Set up and tear down in seconds with the included tripod.

- DMX Channels: 3
- Light Source: 1 LED (cool white) 120 W (30.6 A), 50,000 hours
- Zoom Angle (manual): 14° to 20°
- Colors: 7 + white
- Illuminance (14°): 16.060 lux @ 2 m
- Illuminance (20°): 7,900 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 16.5 lb (7.5 kg)
- Size: 22.9 x 11 x 13.4 in (582 x 279 x 341 mm)





IR Remote Included

Scorpion Dual is a dual Fat Beam aerial laser effect, perfect for events with fog or haze. Its dual mirror output makes a great centerpiece or side accent and offers 32 patterns including the popular "laser sky" effect. Generate customized and everchanging laser shows using programmable pan, tilt, and zoom effects with separate X, Y, and Z rolling effects and scan speed adjustment. Easily operate it in automatic, master/slave, manual or soundactivated mode or wirelessly control it using the included IR Remote.

- DMX Channels: 10
- Light Source: 532 nm/50 mW (green) laser diode
- Zoom Angle: 1° to 29°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.8 lb (1.7 kg)
- Size: 8.5 x 6.3 x 7.1 in (216 x 161 x 179.5 mm)

Laser light. Avoid direct eye exposure. Class IIIa laser product. Classified per 21 CFR 1040.10 & .11 Complies with FDA performance standards for laser roducts except for deviations pursuant to Laser Notice









Scorpion Storm FX RGB is a tri-colored laser light that creates a star field effect of multicolored patterns to enhance your event with depth and movement. Scorpion Storm FX RGB includes an IR remote for wireless control of all three colors and sound-activated auto programs. Fits best in the CHS-40 VIP Gear Bag.

- DMX Channels: 7
- Light Source: 650 nm/100 mW (red) laser diode, 532 nm/40 mW (green) laser diode, 450 nm/100 mW (blue) laser diode
- Coverage Angle: 100°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.7 lb (1.7 kg)
- Size: 9.1 x 7.6 x 7.5 in (232 x 194 x 191 mm)

Avoid direct eye exposure. Class 3R laser product.



Complies with FDA performance standards for laser ducts except for deviations pursuant to Laser Notice 50, dated June 24, 2007.











manual, or sound-activated mode.

DMX Channels: 10

IR Remote Included Scorpion Dual RGB

 Light Source: 638 nm/30mW (red) laser diode, 520 nm/20 mW (green) laser diode, 450 nm/ 50 mW (blue) laser diode

Imagine the visual drama of a Dual RGB FAT BEAM™ aerial effect laser that lets you create perfect color combinations by mixing red, green, and blue laser diodes—That's the power of Scorpion Dual RGB. This laser has 32 built-in patterns, including the popular "Laser Sky" effect for breathtaking

visuals, which are perfect for events with fog or haze. Scorpion Dual RGB features a unique dual mirror output with scan/speed adjustment, so you

can generate customized ever-changing laser shows using programmable

pan, tilt, and zoom effects with separate X, Y, and Z rolling images. This

fixture is fully FDA compliant, variance-free, and ready to use right out of

the box. Easily operate Scorpion Dual RGB in automatic, Master/Slave,

Zoom Angle: 1° to 29°

Laser light.

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.8 lb (1.7 kg)
- Size: 8.5 x 7 x 6.3 in (216 x 179.5 x 161 mm)



Avoid direct eye exposure. Class IIIa laser product. Classified per 21 CFR 1040.10 & .11 Complies with FDA performance standards for laser oducts except for deviations pursuant to Laser Notice

















4BAR Tri USB is a complete wash lighting solution with high-intensity tricolor (RGB) LEDs that can be controlled wirelessly via the included wireless footswitch or the optional IRC-6 controller. It also features D-Fi USB compatibility for wireless master/slave or DMX control. A convenient tripod stand and carrying bag are included for quick and easy setup and tear down. of D-Fi USB compatibility for wireless master/slave and DMX control.

- DMX Channels: 3 or 15
- Light Source: 28 LEDs (tri-color RGB) 3 W (1 A), 50,000 hours
- Beam Angle: 18°
- Illuminance: 2,330 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 23.8 lb (10.8 kg)
- Size: 41.3 x 2 x 10.6 in (1,050 x 50 x 270 mm)













4BAR USB

4Bar USB is a complete wash lighting solution designed for mobile entertainers. The ultra-convenience of the included tripod, wireless footswitch, and carry bags allow you to set up and tear down in minutes. But the ease and versatility of the 4Bar USB go to higher levels with the addition Achieve total room or stage coverage with 4Bar USB's four individually adjustable heads--create larger, synchronized light shows with other 4BAR fixtures in master/slave mode. Generate shows with easy-to-access, builtin, automated programs, or easily control static colors and automated programs with the optional IRC-6 remote.

- DMX Channels: 3 or 15
- Light Source: 432 LEDs (144 red, 144 green, 144 blue) 0.25 W (20 mA),
- Beam Angle: 21°
- Illuminance: 725 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 10.8 lb (4.9 kg)
- Size: 47.4 x 2 x 11.2 in (1,205 x 50 x 284.5 mm)







4BAR LT Quad BT

The rich, warm color-mixing power of amber LEDs comes to one of the most convenient pack-n-go wash lighting systems anywhere. This quad-color (RGBA) fixture comes equipped with built-in Bluetooth® wireless technology so you can light easier right from your phone or tablet with the BTAir app (patent pending). In addition, D-Fi USB compatibility for wireless master/ slave or DMX control is also on board. This complete wash lighting solution has 4 individually adjustable heads to achieve total room or stage coverage.

- DMX Channels: 4, 6 or 19
- Light Source: 12 LEDs (quad-color RGBA) 4 W, (2 A), 50,000 hours
- Beam Angle: 12°
- Illuminance: 2,162 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 7.2 lb (3.3 kg)
- Size: 36.1 x 3.7 x 10.8 in (918.1 x 95 x 274.3 mm)
- Bluetooth Version: 4.2
- Max Unobstructed Distance: 150 ft (25.7 m)











4BAR Flex T USB

4BAR Flex TUSB is one of the most versatile and convenient pack-n-go lighting systems anywhere. The unit features unmatched flexibility with the addition of D-Fi USB compatibility for wireless master/slave or DMX control. You can max.imize setup possibilities and configurations with two included L-brackets and the unit mounts to most tripods or speaker stands, without the need for additional clamps, using the pass-through hole. Create the ultimate light show by mounting up to four additional fixtures to the top of the 4BAR Flex T USB and provide electricity to the additional lights by using the built-in Edison plugs.

- DMX Channels: 3 or 15
- Light Source: 28 LEDs (tri-color RGB) 3 W, (800 mA), 50,000 hours
- Beam Angle: 18°
- Illuminance: 2.330 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 11.7 lb (5.3 kg)
- Size: 47.4 x 5.5 x 14.8 in (1.205 x 140 x 374.8 mm)











GigBAR 2 is a powerful pack-n-go 4-in-1 lighting system including UV in its wash lights and strobes for better color mixing and effects. GigBAR 2 includes two LED Derby fixtures, LED wash lights, a laser, and four high-power LED strobe lights all mounted on one bar. The unit features phenomenal built-in automated and sound-activated programs including all four effects. You can easily control the unit from the display. IRC-6 remote control, wireless footswitch or DMX to take your gig to a higher level. Master/slave multiple units and save time running cables and extension cords by power linking multiple units. Get in and get out quickly with the included tripod, wireless footswitch and free carry bag.

- DMX Channels: 3, 11 or 23
- Light Source: Pars: 6 LEDs (quad-color RGB + UV) 3.5 W (1A), 50,000 hours Strobe: 4 LEDs (white & UV) 5 W (1.5A), 50,000 hours Derby: 6 LEDs (2 red, 2 green, 2 blue) 5 W (1.6 A), 50,000 hours Laser: 650 nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode
- Stand Height: 4.8 ft to 8.3 ft (1.5 to 2.5 m)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 25.6 lb (11.6 kg)
- Size: 46.7 x 4.3 x 15.2 in (1185 x 110 x 386.5 mm)

Laser light. Avoid direct eye exposure. Class 3R laser product. Complies with FDA performance standards for laser products except or deviations pursuant to Laser Notice No. 50, dated June 24, 2007.













GigBAR Flex is an ultra-convenient 3-in-1 Pack-n-Go lighting system with a pair of LED Derbys, LED Quad-color pars (RGB + UV for increased color mixing and effects) and strobes. A pass-through mounting hole for flexible mounting options with various stage and speaker stands and adjustable leg brackets adds versatility.

Pass-through mounting hole for flexible mounting options

with various stage and speaker stands

Stand not Included

- DMX Channels: 3, 8 or 20
- Light Source (pars): 6 LEDs (quad-color RGB + UV) 3.5 W (1 A), 50,000 hours
- Light Source (strobe): 4 LEDs (white & UV) 5 W (1.5 A), 50,000 hours
- Light Source (derby): 6 LEDs (2 red, 2 green, 2 blue) 5 W (1.6 A), 50,000 hours
- Beam Angle (pars): 13°
- Beam Angle (strobe): 8°
- Illuminance (pars): 1,078 lux @ 2 m (per head)
- Illuminance (strobe): 86 lux @ 2 m (per zone) Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 11 lb (5 kg)
- Size: 37.4 x 4.3 x 15.3 in (949 x 110 x 388 mm)
















Pass-through mounting hole for flexible mounting options with various stage and speaker stands



Carry Bag Included


6SPOT is a LED color-changer system, complete with six heads that can be individually oriented and controlled. Each head contains a high-power, tri-color LED. 6SPOT can be controlled in DMX mode, but also features exciting automated or sound-activated programs. It easily slides onto most standard tripod stands, and can be mounted onto truss, using built-in safety bolts.

- DMX Channels: 8
- Light Source: 6 LEDs (tri-color RGB) 3 W (1.1 A), 50.000 hours
- Beam Angle: 11°
- Illuminance: 192 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 10.1 lb (4.6 kg)
- Size: 35.5 x 2.2 x 6.5 in (902 x 56 x 165 mm)











Carry Bag Included

4PLAY

4PLAY is fitted with four LED moonflowers containing red, green, blue and white LEDs that produce razor-sharp rotating beams. Control options include automated, sound and DMX modes. It fits most standard tripods, including speaker stands and the 4BAR tripod. Carry bag included

- DMX Channels: 6
- Light Source: 228 LEDs (48 red, 72 green, 72 blue, 36 white) 0.25 W (20 mA), 100,000 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 12.6 lb (5.7 kg)
- Size: 33 x 3.5 x 12.5 in (838 x 89 x 318 mm)





IP Rating: IP-43

15 m String of 20 IP Rated bulb sockets (sold separately

Festoon



Optional IRC-6 Remote and

D-Fi USB Transceiver

Festoon is a dynamic outdoor-rated party décor light

featuring the vintage look and feel of standard party

light strings. It is completely pixel-mappable for ultimate

show and programming creativity. Built-in automated

programs also create complex looks in seconds. Festoon

comes with a 15-meter strand of 20 LED bulbs and is

expandable up to three strands per controller. The unit

features D-Fi USB compatibility for wireless master/

slave or DMX control. Non-DMX control is possible in

standalone mode from the digital display or optional IRC-

6 remote. Eyelets are on every lamp holder and a variety

of three party décor options such as paper lanterns can

be clipped to Festoon to increase design flexibility. Fits

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Size (String): 590.5 x 2.4 x 5.2 in (15,000 x 60 x 133 mm)

(Controller): 7.5 x 8.4 x 1.9 in (190 x 213 x 48.7 mm)

best in the CHS-50 VIP Gear Bag.

(20 mA), 50,000 hours

IP Rating: IP43

 DMX Channels: 3, 8, 9, 60, 120 or 180 Light Source: 5 SMD LEDs (tri-color RGB) 0.1 W,

Weight (Controller): 10.6 lb (4.8 kg)

Pack of 20 IP rated bulbs (sold separately) IP Rating: IP-43











Festoon VW

Festoon VW is a tri-color (warm white, cool white, amber) décor string light system that provides the familiar elegance of vintage string lights to any event. Its strings and bulbs are IP43 rated making them perfect for outdoor use. Festoon VW is pixel-mappable for ultimate show and programming creativity. Every lamp holder has evelets for quick and easy mounting, D-Fi USB compatibility for wireless master/slave or DMX control is also onboard making Festoon VW even more versatile and convenient. Even without DMX, amazing lighting looks are possible with built-in automated programs and non-DMX control in standalone mode from the digital display or optional IRC-6. A variety of third party décor options like paper lanterns can be clipped to Festoon to increase design flexibility.

- DMX Channels: 3, 8, 9, 60, 120 or 180
- Light Source: 3 SMD LEDs (tri-color warm white, cool white, amber)
- 0.2 W (50 mA) per bulb, 50,000 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- IP Rating: IP43
- Weight: (Controller): 10.6 lb (4.8 kg)
- Size: (String): 590.5 x 2.4 x 5.2 in (15,000 x 60 x 133 mm) (Controller): 7.5 x 8.4 x 1.9 in (190 x 213 x 48.7 mm)



Festoon String 15 m String of 20 IP Rated bulb sockets (sold separately) IP Rating: IP-43







Optional IRC-6 Remote

Wash FX 2

Wash FX 2 is a multi-purpose effect light with 18 Quadcolor (RGB+UV) LEDs that can be used as a regular wash light or eve-candy effect with 6 chasing zones. Powerful UV LEDs create a psychedelic blacklight effect and provide brilliant color-mixing capabilities. Wash FX 2 can be controlled with the wireless IRC-6 Remote for wireless triggering or in stand-alone, DMX, IR or master/slave modes. Fits best in the CHS-40 VIP Gear Bag.



- DMX Channels: 3, 4, 8 or 28
- Light Source: 18 LEDs (quad-color RGB+UV) 6 W, (2 A), 50.000 hours
- Illuminance: 1.795 lux @ 2 m
- Beam angle: 40°
- Field angle: 64°
- Input Voltage: 100 to 240 VAC. 50/60 Hz (auto-ranging)
- Weight: 5.7 lb (2.6 kg)
- Size: 12.2 x 5.5 x 9 in (310 x 140 x 230 mm)

















DMX Channels: 3, 10 or 30

Light Source:

50.000 hours

50.000 hours

Weight: 3.5 lb (1.6 kg)

Optional IRC-6 Remote

with the IRC-6 for flexible control over all features.

Center Pods: 5 LEDs (quad-color RGB+UV) 6W. (2.1 A).

Outside SMDs: 30 SMDs (tri-color RGB) 0.3 W, (0.1 A),

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 11.1 x 8.2 x 6.1 in (285 x 207 x 155 mm)

FXarray Q5



FXpar 3 is a compact effect par with multiple technologies in a single fixture. It includes three spread light evenly across the dance floor with brilliant 8 W quad-color (RGB+UV) center LEDs. RGB SMD eve candy effects. Control the wash LEDs and the LED lights and SMD strobes. Separate control of these RGB SMDs separately for dynamic light shows and features makes creating breathtaking effects easy. FXpar generate eve-catching effects with sound-activated 3 is compatible with the IRC-6 for flexible control over and automated programs. FXarray Q5 is compatible all features and includes powerful sound-activated and automated programs.



FXpar 9

FXpar 9 is a dynamic and compact multi-effect fixture. It has an outer ring of RGB+UV LEDs, a center LED, and SMD strobes, each featuring separate control. Mutable zones allow for spectacular effects via DMX. Sound activation, automated programs or easy control via the optional IRC-6 remote also let you easily achieve evecatching effects. Save time setting up with power linking.





· Light Source: Center Pods: 3 LEDs (quad-color RGB+UV) 8 W, (2.4 A), 50.000 hours Center SMDs: 18 LEDs (tri-color RGB) 0.5 W, (0.2 A),

50.000 hours Strobe: 27 LEDs (cool white) 0.5 W. (0.1 A).


50.000 hours

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Weight: 2.4 lb (1.1 kg)
- Size: 10.4 x 8.4 x 3 in (264 x 214 x 76.9 mm)









 Light Source: Outside Pods: 9 LEDs (quad-color RGB+UV) 4 W, (1.4 A), 50.000 hours

Center Pods: 1 LED (tri-color RGB COB) 18.4 W, (2 A), 50.000 hours

Strobe: 21 LEDs (cool white SMDs) 0.5 W. (0.2 A). 50.000 hours

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

- Weight: 3.6 lb (1.6 kg)
- Size: 10.9 x 10.8 x 2.9 in (279 x 275 x 74 mm)













Abvss USB

D-Fi USB Transceiver

Abyss USB is a pleasing multicolored water effect that shines through any environment with or without fog using upgraded, high power LEDs. It can be controlled wirelessly via master/slave or DMX thanks to its D-Fi USB compatibility. A dichroic color wheel and two glass effect wheels are independently controllable to expand design options. Non-DMX control is possible in standalone mode, from the digital display or optional IRC-6 remote control. Save time running cables and extension cords by power linking multiple units. Fits best in the CHS-40 VIP Gear Bag.

- DMX Channels: 3
- Light Source: 1 LED (cool white) 30 W (7 A), 50,000 hours
- Coverage Angle: 59° Illuminance: 715 lux @ 2 m
- · Colors: 5 + white, Rainbow scroll
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 6 lb (2.7 kg)
- Size: 7.7 x 9 x 9.7 in (195 x 228 x 246 mm)





Helicopter Q6 is a multi-effect effect light designed to dazzle and energize the dance floor. It features adjustable RGBW beams, a round SMD strobe and a red/green pattern laser on a rotating base with continuous pan rotation creating unique and amazing effects. Its narrow, razor-sharp beams of RGBW light create astonishing aerial effects and the rotating red and green laser produces thousands of razor sharp beams that cover a large area. Helicopter Q6 is easy to control using automated and sound-activated programs, master/slave, DMX or an optional IRC-6 Remote.

- DMX Channels: 3 or 16
- Light Source:
- Beam: 6 (RGBW) 6.9 W. (2 A), 50,000 hours Strobe: 24 LEDs (white) 1 W. (281 mA), 50,000 hours Laser: 650 nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Complies with FDA performance standards for laser

ducts except for deviations pursuant to Laser Notice

- Weight: 8.8 lb (4 kg)
- Size: 15.4 x 15.4 x 9.4 in (390 x 390 x 239.7 mm)

Avoid direct eye exposure.

50, dated June 24, 2007.

Swarm Wash FX

Optional IRC-6 Remote

combines an RGBAW rotating derby, RGB+UV wash, red/green laser, and a ring of white SMD strobes. Create an endless array of looks by individually controlling each effect via DMX and master/slave modes, or an optional IRC-6 remote. Other features include automated and sound-activated programs and a user-friendly menu structure. Multiple units can be power linked to save time running cables and extension cords. Fits best in the CHS-40 VIP Gear Bag.

- Rotating Derby: 5 LEDs (1 red, 1 green, 1 blue, 1 amber, 1 white) 2 W (650 mA) 50,000 hours Wash: 8 LEDs (quad-color RGB+UV) 1.5 W (600 mA).
- Strobe: 12 LEDs (white) 1 W (300 mA), 50,000 hours Laser: 650 nm/100 mW (red) laser diode, 532 nm/30 mW

Complies with FDA performance standards

for laser products except for deviations

ursuant to Laser Notice No. 50, dated

- Size: 13.1 x 13 x 9.5 in (335 x 332 x 241 mm)

3 W (300 mA), 50,000 hours Strobe: 8 LEDs (white) 1 W (300 mA), 50,000 hours Laser: 532 nm/50 mW (green) laser diode. 650 nm/100 mW (red) laser diode

Swarm 5 FX

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Swarm 5 FX is a 3-in-1 LED effect fixture that

combines red and green lasers, white strobe effects,

and multicolored rotating derby effects into one

compact setup. Match the look of any event by

creating customized light shows with separate color

and program control. Quickly create a look using

built-in automated and sound-activated programs, or

master/slave and DMX mode. Create a synchronized

light show and save time running cables and extension

cords by power-linking multiple units. Fits best in the

Derby: 5 LEDs (1 red, 1 green, 1 blue, 1 white, 1 amber)

SITTORK

Weight: 9.9 lb (4.5 kg)


CHS-40 VIP Gear Bag.

DMX Channels: 9

Light Source:

• Size: 8.9 x 11.7 x 12.2 in (225 x 298 x 310 mm)

Avoid direct eye exposure.







modes or the optional IRC-6 remote.

- DMX Channels: 2 or 12
- 50,000 hours Strobe: 12 SMD LEDs (cool white) 1 W (300 mA),
- 50.000 hours
- Weight: 5.5 lb (2.5 kg)

Laser light. Avoid direct eve exposure.

Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50, dated









Coverage Angle: 360°

Weight: 8.6 lb (3.9 kg)



Optional IRC-6 Remote

Rotosphere Q3



DMX Channels: 3, 9, or 19



• Size: 10.5 x 12.6 x 16.5 in (266 x 319 x 419 mm)



Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Available in black or white

Rotosphere Q3 is an easy to use mirror ball simulator

with high-power, quad-color LEDs. Three LED zones

emit up to three different colors simultaneously and the

slow speed of rotation creates the perfect atmosphere

with the optional IRC-6 Remote and the digital display

even allows you to set a color and rotation speed without

any controller. Mount Rotosphere Q3 to truss with the

included bracket or place it on a stand as a centerpiece.

Fits best in the CHS-50 VIP Gear Bag.





















Derby X features six individually controllable LED clusters

that project multicolored beams. Additional features include

automated and sound-activated programs, power-linking

capabilities and blackout, static and strobe effects. Combine

multiple X-series units using the included X bracket. Fits

best in the CHS-40 VIP Gear Bag.

Combine multiple units

using the included X bracket

DMX Channels: 8

Derby X

- Light Source: 5 LEDs (quad-color RGBW) 7 W, (2.4 A), Light Source: 90 LEDs (30 red, 30 green, 30 blue) 0.25 W 50,000 hours (20 mA), 100,000 hours
 - Coverage Angle: 96°
 - Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
 - Weight: 4 lb (1.8 kg)
 - Size: 11.9 x 15 x 7.4 in (302 x 382 x 187 mm)







Light Source: 27 LEDs (tri-color RGB) 1.5 W, (0.6 A),



Optional IRC-6 Remote

Line Dancer is a compact LED effect light that projects strips

of rotating multicolored light and creates mid-air effects

that blanket an entire space with eye-catching patterns.

Multiple zones and adjustable rotation speeds provide

spectacular animated effects. The digital display allows you

to set a color and rotation speed without any controller.

Line Dancer

















Swarm Wash FX is a 4-in-1 LED effect fixture that

DMX Channels: 2 or 18

Light Source:

50.000 hours

- (green) laser diode
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 9.3 lb (4.2 kg)

Laser light.

une 24, 2007.

Avoid direct eye exposure





























Swarm 4 FX combines three dynamic lighting effects in one rugged and compact housing. It includes quadcolor (RGBA) dual moonflowers, a red/green laser and a white strobe. The dual moonflowers spin enough colorful beams to fill an entire dance floor with energy for slow dancing. Rotosphere Q3 is easily controllable and excitement. Added impact is provided by thousands of razor sharp red and green beams produced by the laser. The bright output of the strobe ring, which features built-in motion effects, adds to the fun. Control options include sound activation, master/slave, DMX

 Light Source: Moonflower: 2 LEDs (quad-color RGBA) 13 W (4.4 A).

Laser: 532 nm/30 mW (green) laser diode, 650 nm/100 mW (red) laser diode

• Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 11.4 x 14.2 x 4.2 in (290 x 360 x 107 mm)




































. DMX Channels: 3 or 6















Mini Kinta IRC

Mini Kinta is fitted with 3 W LEDs to punch through nearly any ambient lighting or fog. Filling a room floor to ceiling with razor sharp beams, it delivers an output that surpasses those of much larger derby effects. DMX controllable, it also features exciting built-in programs. An optional IRC-6 Remote is available for wireless control. Fits best in the CHS-30 VIP Gear Bag.



- DMX Channels: 4
- Light Source: 4 LEDs (1 red, 1 green, 1 blue, 1 white) 3 W (980 mA), 50,000 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.5 lb (1.6 kg)
- Size: 10.3 x 7.3 x 7.4 in (261 x 186.5 x 186.8 mm)



















Optional IRC-6 Remote

CHS-30 VIP Gear Bag. DMX Channels: 2 or 9 Light Source: Derby: 4 LEDs

50.000 hours

(green) laser diode

Weight: 3.7 lb (1.7 kg)

Laser light.

Kinta FX



Complies with FDA performance standards for

laser products except for deviations pursuant

to Laser Notice No. 50, dated June 24, 2007.

Kinta FX combines an LED derby effect, laser and SMD

strobe in one compact fixture. These effects can be

coordinated to create a variety of exciting looks that

feature multicolored derby beams, dynamic strobes

and chases plus hundreds of sharp red and green laser

beams. Control this versatile fixture easily via DMX,

master/slave, optional IRC-6 Remote or its digital

(1 red, 1 green, 1 blue, 1 white) 7.5 W (2.4 A),

Size: 7.4 x 10.3 x 7.4 in (187 x 261 x 187 mm)

Avoid direct eye exposure.

Strobe: 16 SMD LEDs (white) 5 W (1.6 A), 50,000 hours

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)








Mushroom

Mushroom is a classic plug-and-play effect light that generates hundreds of sharp, multi-colored beams. Built-in automated programs and sound activation modes mean no programming is needed. Mushroom's compact size and light weight make load-in and set up effortless. Fits best in the CHS-40 VIP Gear Bag.

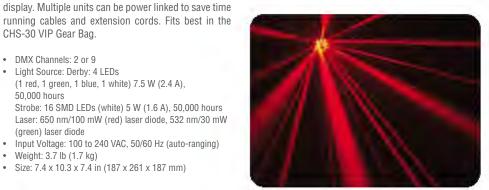

- Light Source: 6 LEDs (2 red, 1 green, 1 blue, 1 amber, 1 white) 14 W, (3.6 A), 50,000 hours
- Coverage Angle: 102°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.9 lb (1.3 kg)
- Size: 9.4 x 7.3 x 7.3 in (238 x 185 x 185 mm)







IRC-6 Remote Included

JAM Pack Gold

JAM Pack Gold is a winning package of four alwayspopular party effects that are ready to use right out of the box. Included are a derby effect, a laser, a fog machine with fluid, a UV wash/strobe combo light, a wireless IRC-6 Remote and three external power supplies.



- Light Source: Derby: 3 LEDs (1 red, 1 green, 1 blue) 6 W (1.76 A), 50,000 hours UV strobe: 9 LEDs (5 UV/4 white) UV 1.05 W - white 0.60 W (UV 0.31 A - white 0.19 A), 50,000 hours Laser: 650 nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode
- Tank Capacity (fogger): 0.2 gal (0.6 l)

ACTIVATED

Avoid direct eye exposure. Class 3R laser product. Complies with FDA performance standards for laser roducts except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.







DJ Bank is a staple of garage bands and entry-level mobile DJs. This compact bank-style fixture features four pods of LEDs for dynamic chase effects that quickly add color and energy. The "all-on" option activates all four pods at once to wash the room. Fits best in the CHS-SP4 VIP Gear Bag.



- · Light Source: 140 LEDs (35 red, 35 green, 35 blue, 35 amber) 0.25 W (20 mA), 100,000 hours
- Beam Angle: 14°
- Illuminance: 541 lux @ 2 m Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Weight: 3.1 lb (1.4 kg)
- Size: 15.8 x 4.5 x 5.5 in (401 x 114 x 140 mm)









Duo Moon

Duo Moon is a plug-and-play LED effect light that projects a fun moonflower and strobe effect. It includes built-in automated and sound-activated programs. Duo Moon is compact and ready to use right out of the box.



LX-5 uses 56 LEDs to project sharp and colorful moonflower effects. Lightweight and compact, it runs on automated mode or sound-activation, which makes it ideal for mobile functions where fast set up and easy operations are key. Multiple units can be daisy chained to cover larger venues. Fits best in the CHS-40 VIP Gear Bag.



BOB LED

BOB LED is the hottest simulated flame effect light on the market, but generates no heat. This LED powered, duty-cycle free fixture perfectly simulates a flickering cauldron. BOB LED can either stand on included legs or hang from an included chain.



- Light Source: 66 LEDs (24 red, 18 green, 12 blue, 12 white) 1 W, (2 mA), 50,000 hours
- Coverage Angle: 52°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.2 lb (1 kg)
- Size: 7.3 x 7.5 x 6.7 in (185 x 190 x 170 mm)




- Light Source: 56 LEDs (16 red, 24 green, 16 blue) 0.25 W (20 mA), 100,000 hours
- Coverage Angle: 40°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.2 lb (1 kg)
- Size: 8.6 x 5.1 x 5.7 in (219 x 130 x 144 mm)











- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight (with legs): 5.1 lb (2.3 kg)
- Size (with legs): 17.5 x 17.5 x 30.5 in (455 x 455 x 775 mm)
- Weight (with chains): 4.9 lb (2.2 kg)
- Size (with chains): 11 x 11 x 29 in (280 x 280 x 737 mm)















Freedom H1





Optional IRC-6 Remote and D-Fi USB Transceiver

COREpar UV USB

COREpar UV USB is a compact UV wash with COB (chip-on-board) LED technology, it offers D-Fi USB compatibility for wireless master/slave or DMX control. It includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flicker-free performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility.

- DMX Channels: 1 or 5
- Light Source: 1 COB LED (UV) 70 W (1.5 A), 50,000 hours
- Coverage Angle: 100° without Fresnel lens, 50° with
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.6 lb (2.1 kg)
- Size: 5.5 x 7.9 x 10 in (139 x 200 x 253 mm)























EVE P-150 UV

EVE P-150 UV is a brawny blacklight cannon fitted with 40 UV LEDs emitting 150 watts of blacklight power. The unit is designed without a fan and its silent operation combined with its flicker-free output make it ideal for video use. EVE P-150 UV is D-Fi USB compatible giving users the option to control the light wirelessly in master/slave mode or wireless DMX control, 25° and 45° magnetic lenses to adjust the beam are included along with a gel frame holder and accessory slot for optional barn doors.

- DMX Channels: 1 or 5
- Light Source: 40 LEDs (UV) 150 W total, (2 A),
- Coverage Angle: (narrow lens): 25° (no lens): 35°(wide lens): 45°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 7.7 lb (3.5 kg)
- Size: 8.7 x 9.6 x 12 in (220 x 245 x 305 mm)













SlimSTRIP UV-18 is an attractive and powerful UV strip light. It casts a rich UV light with wide coverage and can be controlled wirelessly with the optional CHAUVET DJ IRC-6 Remote. Use the SlimSTRIP UV-18 instead of a traditional fluorescent for a safe, ecofriendly, bright and beautiful UV light. SlimSTRIP UV-18 fits nicely in the CHS-60 VIP Gear Bag for safe transporting.

- DMX Channels: 3
- Light Source: 18 LEDs (UV) 3 W (700 mA), 50,000 hours
- Coverage Angle: 160°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 5.3 lb (2.4 kg)
- Size: 41.9 x 2 x 5 in (1,065 x 45 x 128 mm)







Optional IRC-6 Remote

LED Shadow

LED Shadow is a panel wash that delivers stunning blacklight effects. Built-in auto programs trigger flash and strobe in patterns.

- DMX Channels: 3
- Light Source: 192 LEDs (UV) 0.25 W (20 mA), 100.000 hours
- Coverage Angle: 28°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.9 lb (2.2 kg)
- Size: 14 x 9.8 x 6.5 in (356 x 248 x 165 mm)































Shocker 2

Shocker 2 is a punchy dual zone blinder with warm white 85 W COB LEDs. Perfect for theatrical productions, concerts, dance floors and more, Shocker 2 has an included expansion bracket that allows guick attachment of a second unit to create a 4-head blinder. Adjustable pulse width modulation (PWM) control is on board to eliminate flicker on camera. Shocker 2 has PowerCON®compatible power input/output connections for power linking up to 4 fixtures and flexible control options with onboard 3- and 5-pin DMX connectors.



- DMX Channels: 1, 2, 4, 7 or 8
- Light Source: 2 COB LEDs (warm white) 85 W, (3.6 A), 50,000 hours
- Beam Angle: 51°
- Color Temperature: 3200 K
- Illuminance: 1,080 lux @ 2 m (one pod), 2,397 lux @ 2m (both pods)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 10.4 lbs (4.7 kg)
- Size: 14.8 x 4.6 x 6 in (375 x 116 x 153 mm)















Shocker Panel 180 USB

Shocker Panel 180 USB is a high-impact LED strobe light with four zones of control. Eye-popping effects and chases can be triggered via master/ slave, DMX mode or the optional IRC-6 Remote. It also offers D-Fi USB compatibility for wireless master/slave or DMX connectivity. It can be power linked in multiples to save time running cables and extension cords. Fits best in the CHS-25 VIP Gear Bag.

> 99999 00000

00000

00000

99999/

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 8.8 x 2.25 x 7.8 in (223 x 57 x 198 mm)

00000



Mini Strobe LED

Mini Strobe LED is an ultra-compact and lightweight strobe light, ready for use right out of the box. Simply plug in the unit and adjust the flash rate for the desired effect. LED power means it will run all night and stay cool to the touch. Fits best in the CHS-40 VIP Gear Bag.



- DMX Channels: 2, 5 or 8 Light Source: 180 SMD LEDs (cool white) 0.5 W (644 mA), 50,000 hours
 - Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
 - Weight: 0.4 lb (0.2 kg)
 - Size: 5.1 x 4 x 3.7 in (130 x 102 x 95 mm)



- Light Source: 21 LEDs (cool white) 0.25 W (20 mA), 100,000 hours



DMX Channels: 15

Gevser P7

- Output: 17,000 cfm
- Light Source: 7 LEDs (penta-color RGBA+UV) 9 W (3 A), 50.000 hours

Geyser P7 is a dynamic pyrotechnic-like effect that creates thrilling bursts

of fog lit with seven 9 W penta-color (RGBA+UV) LEDs for endless color

capabilities. Two LED zones can create two-tone bursts of fog without the

use of any toxic chemicals, fire or heavy CO2 canisters. Control the unit

from the built-in DMX or the included Geyser wireless remote and assign

different colors to each of the remote's buttons. The onboard digital display

allows for easy configuration even in fast-paced or dark environments.

- Tank Capacity: 0.7 gal (2.5 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 18.7 lb (8.5 kg)
- Size: 15.7 x 14.2 x 8.2 in (400 x 362 x 210 mm)



Wireless Remote Included

Gevser P5

Geyser P5 produces safe and dynamic, color-filled bursts of fog without the use of any toxic chemicals, fire or heavy CO2 canisters. Five pentacolor (RGBA+UV) LEDs create beautiful color mixing. Assign different colors to each of the included remote¹s buttons and the manual button. Control the unit from built-in DMX, included Geyser wireless remote, or manual control. The digital display allows easy configuration even in dark, fast paced environments and Geyser P51s small form factor allows the unit to go anywhere.



Geyser T6 brings a burst of lighting energy to your events with a pyrotechnic-like effect. Geyser T6 illuminates bursts of water-based fog with 6 tri-color (RGB) LEDs. Its advanced fluid sensor with automatic shut off protects the pump from overheating. Compact and lightweight, Geyser T6 is perfect for mobile applications.



- DMX Channels: 10
- Output: 13.500 cfm
- Light Source: 5 LEDs (Penta-color RGBA+UV) 7 W (2.6 A), 50.000 hours
- Tank Capacity: 0.7 gal (2.5 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 13.4 lb (6.1 kg)
- Size: 13.4 x 13.3 x 7 in (340 x 338 x 179 mm)



- Output: 8,000 cfm
- Light Source: 6 LEDs (tri-color RGB) 3 W (332 mA), 50,000 hours
- Tank Capacity: 0.28 gal (1.07 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 7.1 lb (3.2 kg)
- Size: 12 x 8.25 x 7 in (304.8 x 209.55 x 177.8 mm)











Illuminance: 257 lux @ 2 m

Weight: 3.5 lb (1.6 kg)

Beam Angle: 65°







.

66666

00000

















Non-toxic, non-flammable paper confetti refills (Not Included)



Funfetti Shot

Funfetti Shot is a wirelessly controlled confetti launcher. With easy setup by one person, it sends powerful blasts of confetti flying for distances up to 30' (9 m) and covering an area as large as 540 square feet (50 m2). Each powerful burst of confetti lasts as long as 25 seconds. The launcher can be controlled in manual. wireless and DMX modes. For added versatility, it works with a variety of confetti types including UV. A double-bracketed voke allows easy floor mounting or hanging. Safe and convenient, Funfetti Shot does not rely on compressed air or CO2. For easy transport, use the CHS-50 VIP Gear Bag.

- DMX Channels: 1
- Maximum Confetti Capacity (FRC and FRU Confetti): 0.6 lb (0.25 kg)
- Maximum Continuous Launch Duration: 25 s
- Maximum Throw Distance: 30 ft (9 m)
- Average Coverage Area: 540 ft² (50 m²)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 13.7 lb (6.2 kg)
- Size: 11.2 x 9 x 21.8 in (284 x 228 x 553 mm)



SM-250 is a high output snow machine with userfriendly volume adjustment included via the included wired timer remote, built-in DMX and digital display. SM-250 also features a convenient Hi/Low blower switch for coverage of near and far distances and its non-toxic water based snow fluid (sold separately) is safe for all environments.

- DMX Channels: 1
- Tank Capacity: 1.3 gal (5 l)
- Fluid Consumption: 580 ml/min
- Input Voltage: 120 VAC, 60 Hz
- Weight: 20.3 lb (9.2 kg)
- Size: 17.6 x 13.5 x 13.9 in (449 x 344 x 355 mm)

- Output: 4.300 cfm

- Size: 10.9 x 15.6 x 9.6 in (277 x 396 x 245 mm)



Hurricane Haze 2D

Hurricane Haze 2D is a water-based haze machine with continuous output and a digital display to set DMX and standalone functions. It features a low-fluid indicator. adjustable blower output speeds, and a nozzle to direct haze where you need it. The included wired timer remote is conveniently stored in the fixture.

- DMX Channels: 2
- Output: 1,200 cfm
- Tank Capacity: 0.7 gal (2.5 l)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Weight: 18.7 lb (8.5 kg)

Hurricane Haze 1DX

any location.

DMX Channels: 1

Output: 800 cfm

Tank Capacity: 0.4 gal (1.5 l)

Weight: 7.3 lb (3.3 kg)

Hurricane 2000

Size: 11.2 x 10.5 x 13.7 in (285 x 267 x 350 mm)

Hurricane Haze 1DX is a compact and lightweight

hazer that creates a thin atmosphere to enhance any light show. It features a silent running fan that allows the unit to be used in any environment. Its built-in

display lets you quickly and easily set DMX functions

and haze standalone settings. Hurricane Haze 1DX has

a small footprint allowing the machine to be placed in

Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz

Size: 11 x 6 x 9 in (278 x 150 x 223 mm)



FC-T Included

Hurricane 1800 Flex

DMX Channels: 1

Hurricane 1302

Output: 20.000 cfm

Weight: 15.2 lb (6.9 kg)

Tank Capacity: 0.9 gal (3.3 l)

Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz

• Size: 16.5 x 12.5 x 11.8 in (420 x 320 x 302 mm)

- Tank Capacity: 1.3 gal (5 l)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Output: 25,000 cfm
- Weight: 27.6 lb (12.5 kg)
- Size: 22.2 x 13.4 x 15 in (563 x 340 x 380 mm)



FC-T Included

Hurricane 1600

- DMX Channels: 1
- Tank Capacity: 0.63 gal (2.4 l)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Output: 25,000 cfm
- Weight: 13.2 lb (6 kg)
- Size: 13.7 x 12.3 x 10 in (348 x 312 x 253 mm)



Hurricane 1200

- Tank Capacity: 0.26 gal (1.0 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Output: 18,000 cfm
- Weight: 6.4 lb (2.9 kg)
- Size: 11.3 x 9.3 x 8.2 in (286 x 235 x 209 mm)





Hurricane 2000 is an event ready, high volume fog machine that produces a thick plume on demand. It features a PowerCON®-compatible power input connection and 3- and 5-pin DMX input/output connections for quick setup options. Hurricane 2000 has Always-ready technology that provides continuous output and its built-in timer provides hands-free, automated operation.

- DMX Channels: 1
- Tank Capacity: 0.8 gal (3 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Output: 25,000 cfm
- Weight: 13.7 lb (6.2 kg)
- Size: 19 x 11.6 x 9.3 in (487 x 297 x 236 mm)

Remote Included



- Tank Capacity: 0.26 gal (1 l)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Output: 10,000 cfm
- Weight: 6 lb (2.7 kg)
- Size: 11.9 x 8.9 x 8.2 in (301 x 225 x 208 mm)



Remote Included

Hurricane 700

- Tank Capacity: 0.2 gal (0.6 l)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Output: 1,500 cfm
- Weight: 4 lb (1.8 kg)
- Size: 12.7 x 6.8 x 6.9 in (325 x 173 x 175 mm)







Hurricane Haze 4D is a low profile hazer with an adjustable scoop to direct the haze and a discreet fan. It can be controlled with the included wired timer remote and built-in DMX.

- DMX Channels: 2
- Tank Capacity: 1 gal (3.75 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 13.2 lb (6 kg)



Fog Machine Cleaning Fluid

Atmospheric Fluids





High Performance Fog Fluid

FJQ







Snow Fluid



Bubble King (B-550)

Bubble King is the biggest name in bubble effects, featuring three double wands, a manual bubble button, and extremely high output. This is the perfect machine when you need bubbles for a large area.

- Tank Capacity: 57.5 oz (1.7 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 13 lb (5.9 kg)
- Size: 19 x 15 x 12 in (483 x 381 x 305 mm)



Bubble Machine (B-250)

Bubble Machine is designed for large areas where portability is a top priority. It is lightweight, thanks to an all plastic construction that also prevents rust, and conveniently features an easily removable fluid tank.

- Tank Capacity: 23.7 oz (0.7 l)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 6.8 lb (3.1 kg)
- Size: 12.5 x 7 x 6.5 in (318 x 178 x 165 mm)

DMX Channels: 2

· Heat-up Time: 3 min

Tank Capacity: Fog Fluid Tank Capacity: 0.9 gal (3.25 l)

• Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz

• Size: 24.6 x 16.1 x 17.8 in (625 x 409 x 453 mm)

Water Tank Capacity: 2 gal (7.6 l)

Fog Fluid Consumption: 80 ml/min

 Water Consumption: 930 ml/min Compatible Fluids: HFG, FJU, HDF, QDF

Weight: 58.9 lb (26.7 kg)

Tank Capacity: 4.5 gal (17 l)

Cumulus is an event ready low-lying fog machine that creates thick clouds that hug the floor

without the need for dry ice. The onboard ultrasonic agitator converts distilled water into a thin

mist. The unit's fast heat up time allows for quick operation and fog on demand. It's rugged flight

case makes transportation a breeze and locking casters prevent accidental rollaways. Cumulus can

be controlled with the on board digital display or DMX.

SUBMIN

- Heat-up Time (single element): 50 min
- Heat-up Time (dual element): 30 min
- Reheat Time (single element): 30 min Reheat Time (dual element): 15 min
- Average Runtime: 6 min
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Dry Ice Capacity: 9.9 lb (4.5 kg)
- Weight (full): 75 lb (34 kg)
- Size: 20.2 x 18.3 x 18.5 in (513 x 465 x 470 mm)

Nimbus is an event ready dry ice machine that delivers thick, low-lying

clouds of fog that hugs the floor and dissipates without rising. It provides

an outstanding return on investment to rental houses and event producers, and is ideally suited for a wedding party's first dance. This powerful machine heats enough water to create fog from 10 pounds (4.5 kg) of dry ice to provide six minutes of run time. Output and flow are easily controlled,

due to an adjustable multi-level control arm. Dual heaters ensure faster

heat-up and recycle times. A low water sensor increases safety.

Easily transport your Nimbus dry ice machine to and from the car and around the dance floor.

- Load Capacity: 75 lb (34 kg)
- Weight: 6 lb (2.7 kg)
- Size: 16.8 x 14.9 x 5.2 in (426 x 379 x 132 mm)



Wired Timer Remote (FC-T)

Atmospheric Remotes

Compatible with Hurricane 1800 Flex, Hurricane 1600, Hurricane 1302, Hurricane 1200. SM-250.



Wireless Motion Sensor (WMS)

Compatible with Geyser P5, Geyser P7, Funfetti Shot, Hurricane 1800 Flex, Hurricane 1600, Hurricane 1302, Hurricane 1200, Hurricane 1000, SM-250.



Wireless Remote (FC-W)

Compatible with Hurricane 1800 Flex, Hurricane 1600, Hurricane 1302, Hurricane 1200. Hurricane 1000. Funfetti Shot. SM-250.





Quick Dissipating Fluid



Control right from your phone or tablet straight to your lights! No additional hardware needed!

- Bluetooth compatibility: V4.2 (or greater)
- Minimum Operating System (Android): Lollipop (V5)
- Minimum Operating System (Apple): iOS 8





FlareCON

FlareCON app is available for both Android and iOS® in both phone and tablet versions. The FlareCON Air can also connect directly to a DMX controller to send wireless signals out to an unlimited number of D-Fi lights or receivers.



- Operating Frequency: 2.412 2.484 GHz
- Antenna Connection: RP-SMA
- Max. Unobstructed Distance: 600 ft (183 m)
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 1.3 lb (0.6 kg)
- Size: 5.6 x 3.6 x 1.8 in (142 x 91 x 46 mm)

FlareCON Air is a wireless transceiver that turns a smartphone or mobile tablet into a DMX lighting controller. It takes Wi-Fi signals from any mobile device and turns them into D-Fi signals for any D-Fi-ready light or hub. The FlareCON app works exclusively with FlareCON Air. FlareCON Air can also connect directly to a DMX controller and then send D-Fi out to D-Fi compatible products or hubs. FlareCON Air is fully FCC and RTTE compliant.

Xpress 512 Plus

information go to:

https://www.chauvetdj.com/showxpress/

Xpress 512 Plus brings you the same capabilities of the Xpress 512, plus an external triggering that is available via a mini-DIN connection or an optional infrared remote. An internal calendar can also trigger playback at a specific time without a computer.

ShowXpress is a free software program that turns almost any computer into a lighting console. It allows direct control over simple PAR cans to the most complex moving lights. All you need is a computer (PC or Mac), a ShowXpress interface and ShowXpress software. The software is now available as an app for your smartphone. You can take ShowXpress on the road and go mobile! Pre-configured for RGB, RGBA, RGBW, and RGBWA fixtures, Pixels makes the creation of show-stopping effects fast and easy, and is included free as a part of your ShowXpress software. For more

- Input Voltage: 5V USB or 9-12 VDC, 300 mA external power supply (not included)
- Weight: 0.7 lb (0.3 kg)
- Size: 4.7 x 3.5 x 1.8 in (119 x 89 x 47 mm)

Xpress 512

Optional Xpress Remote

Xpress 512 is a self-contained DMX-512 interface for the ShowXpress software. The interface is capable of transmitting one universe of DMX and works on both Windows and Mac OS X platforms. Multiple units can be connected for multiple universes of control. Users can store and playback one show without a computer or unlimited shows with a computer.

- Input Voltage: 5V USB
- Weight: 0.4 lb (0.2 kg)
- Size: 4.3 x 3.2 x 1.5 in (108 x 80 x 37 mm)

Xpress 100

Xpress 100 provides a USB to DMX interface for up to 100 DMX channels. It allows for an unlimited number of shows when connected to a computer.

- Input Voltage: 5V USB
- Weight: 0.2 lb (0.1 kg)
- Length: 3.3 ft (1 m)



SlimPAR H6 USB (page 33)







SlimPAR QUV 12 USB (page 33)



SlimPAR T6 USB (page 34)



COREpar 40 USB (page 30)

EVE E-100Z (page 19)

Shocker Panel 180 USB (page 50)



EVE E-50Z (page 19)



COREpar UV USB (page 30)



SlimPAR Pro W USB (page 23)



Abyss USB (page 44)

D-Fi USB **D-Fi USB Compatible Fixtures**

The world's first and only D-Fi USB transceiver



CHAUVET DJ has developed a series of fixtures that include a standard USB connection. You can now wirelessly connect to all of them using the new D-Fi USB transceiver, which eliminates the need for any DMX cables. The USB transceiver is powered directly from the fixture. Control your USB fixtures using any of our wireless controllers, or from your smartphone with the D-Fi Hub and FlareCON.



EVE P-150 UV

(page 20)

EVE P-140 VW

(page 20)



EVE P-130 RGB

(page 20)





EVE P-100 WW

(page 21)







COLORband T3 USB (page 31)

4BAR Tri USB (page 40)



COLORband PiX-M USB (page 31)







SlimBANK T18 USB (page 33)



Gobo Zoom USB (page 29)

SlimPAR T12 USB (page 34)

EZpar T6 USB (page 28)

SlimPAR Pro H USB (page 23)

SlimPAR Q12 USB (page 34)

SlimPAR Pro QZ12 USB (page 23) SlimPAR Q6 USB (page 33)



SlimPAR Pro Q USB (page 23)



COREpar 80 USB (page 30)









DMX-RT is a rugged and compact DMX recording device with triggerable playback. Copy, backup and transfer show files with a built-in micro SD card slot. The unit comes with a mounting bracket for convenient mounting options. The digital display is easy to navigate and lets you easily trigger scenes.

- Programmable Scenes: 999
- Memory Card: 8GB, 32GB (max.) Micro SD
- Memory Card Format: FAT32
- DMX Connectors: 3-pin XLR
- Input Voltage: 12 VDC, 1 A (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 0.4 lb (0.2 kg)
- Size: 3 x 2.9 x 1.7 in (77 x 73 x 43 mm)



DMX-AN is a converter that functions as an Art-Net to DMX or DMX to Art-Net interface. It features a multi-purpose Art-Net/sACN node that converts one Ethernet cable to two DMX universes. Its built-in web-based GUI means no universe/subnet setup and its durable Neutrik® etherCON® in/through port ensures reliability. DMX-AN supports power over Ethernet (POE) or an external power supply and both outputs can be set to either Art-Net or sACN.

- DMX Channels: 1024
- DMX Connectors: 3-pin XLR
- Control Protocol: Art-Net, DMX, sACN
- Input Voltage (DC): 9 VDC, 500 mA
- (external power supply: 100 to 240 VAC, 50/60 Hz)
- Input Voltage (POE): 48V 0.4 A Weight: 0.4 lb (0.2 kg)
- Size: 4.7 x 2.5 x 1.5 in (120 x 64 x 39 mm)



IRC-6 is an easy-to-use infrared remote control (IRC) for all CHAUVET DJ IRC-enabled lighting fixtures. It provides instant access to pre-programmed scenes, color mixing options, and on-thefly speed adjustments. This compact and lightweight remote has an approximate range of 30 feet (9 m). IRC-6 compatible fixtures also include the EZ and Freedom series fixtures and many more!

- Max. Unobstructed Distance: 30 ft (9 m)
- Input Voltage: 3 VDC lithium battery (CR2025)
- Weight: 0.7 oz (20 g)
- Size: 3.9 x 1.8 x 0.3 in (100 x 47 x 7 mm)



D-Fi Hub

D-Fi Hub is a wireless transceiver that converts D-Fi to DMX, or DMX to D-Fi. The D-Fi Hub wirelessly synchronizes an unlimited number of D-Fi-ready lights and products. It turns any DMX controller into a wireless D-Fi controller, or if you already have a CHAUVET DJ D-Fi controller, save yourself the trouble of a long DMX run by placing the D-Fi Hub up in your rig. D-Fi Hub is small and lightweight and has many mounting options.

- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Operating Frequency: 2.412 to 2.484 GHz
- Weight: 1.3 lb (0.6 kg)
- Size: 5.59 x 3.58 x 1.81 in (142 x 91 x 46 mm)



Obev 40 D-Fi 2.4

Obey 40 D-Fi 2.4 is a small, but full-featured lighting controller with a builtin D-Fi transmitter so you can build a rig without long DMX cable runs! It works with any D-Fi compatible product and controls up to 12 different types of lights. It stores scenes and chases for playback and operates lights "on the fly". The stored scenes and chases are triggered by sound, or manually adjusted, to get just the right speed and fade time for your look. Obey 40 D-Fi 2.4 is MIDI compatible and has dedicated fog and strobe controls.

- DMX Channels: 192
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Operating Frequency: 2.433 to 2.48 GHz
- Weight: 5.3 lb (2.4 kg)
- Size: 19 x 6.7 x 3.5 in (483 x 171 x 89 mm)



Obey 70

Obey 70 bridges the gap between smaller rack mount controllers and massive control desks. Fourteen reversible faders and an assignable joystick allow for easy programming of up to twelve 32-channel fixtures. Obey 70 can store up to six sets of chases containing 240 scenes on 384 total channels of control. It also features fog and strobe control, as well as MIDI compatibility.

- DMX Channels: 384
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 7.3 lb (3.3 kg)
- Size: 19 x 7 x 2.8 in (483 x 178 x 71 mm)



Obey 10

Obey 10 is a compact controller ready to handle the complexities of today's lighting fixtures. Capable of controlling up to eight 16-channel fixtures, Obey 10 can store six sets of chases containing up to 999 scenes each.

- DMX Channels: 128
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 3.9 lb (1.8 kg)
- Size: 19 x 3.5 x 3.5 in (483 x 89 x 89 mm)



Obey 6

Obey 6 is a compact DMX controller capable of controlling up to six 6-channel fixtures, perfect for hex-LED (RGBAW+UV) fixtures. It allows you to control effects by simultaneously operating each fixture in different playback modes, with variable fade times. Playback options include manual RGBAW+UV, automated and sound-activated mode. Increase control with adjustable audio sensitivity, strobe and blackout effects.

- DMX Channels: 36
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 3.8 lb (1.8 kg)
- Size: 15.5 x 5.5 x 1.9 in (393 x 140 x 47 mm)



Obev 40

Obey 40 controls up to twelve 16-channel fixtures. Obey 40 has 30 banks on eight scenes, or up to 240 scenes. It also offers fog and strobe control and MIDI compatibility.

- DMX Channels: 192
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 5.7 lb (2.6 kg)
- Size: 19 x 3.5 x 6.7 in (483 x 89 x 171 mm)



Obey 4 is a compact DMX controller for LED wash lights with a 3- or 4-channel DMX mode—red, green, blue and white/amber—for easy color-mixing control. It has built-in automated, sound-activated and manual playback options and can control fixtures in four different zones independently of each other. It features one-touch buttons of pre-mixed colors, built-in chases and strobe and dimmer controls.

- DMX Channels: 16
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 3 lb (1.4kg)
- Size: 12.8 x 5.5 x 2.1 in (325 x 140 x 52 mm)



Obey 3 is a compact DMX controller for LED lights with three channels (red. green and blue only). Playback options include automated, sound-activated or manual RGB color mixing.

- DMX Channels: 3
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 2 lb (0.9 kg)
- Size: 5.5 x 8.3 x 2.1 in (140 x 210 x 52 mm)







Stage Designer 50

Stage Designer 50 is a powerful dimming unit that combines the size of a 24-channel dimming console and the functionality of a 48-channel console. Stage Designer 50 has up to 8 pages with 12 scenes each, and 96,000 programmable steps. The console allows you to re-assign channels as needed and allows for MIDI input.

- DMX Channels: 48
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 9.9 lb (4.5 kg)
- Size: 19 x 10.5 x 3.5 in (483 x 267 x 89 mm)



DMX-4 is a 4-channel dimmer/relay pack equiped with an automatic ON/ OFF when DMX signal is detected. It provides DMX control and/or dimming to units not equipped with DMX on their own. It is optimized for use with small LED fixtures to prevent ghosting and flickering. Each of the 4 sets of outlets (duplex) can be set to any DMX address and independently set as a dimmer or relay. Sixteen user-selectable chase patterns make programming a breeze.

- DMX Channels: 1, 2 or 4
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 5 lb (2.2 kg)
- Size: 8.3 x 7.7 x 2.8 in (210 x 194 x 70 mm)



Data Stream 4

Data Stream 4 is a universal DMX-512 optical splitter that distributes the incoming DMX signal, in daisy chain configurations, into four separate outputs with an additional "thru" port.

- DMX Connectors: 3 and 5-pin XLR
- Rackmount: 1U
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 5.7 lb (2.6 kg)
- Size: 19 x 5.3 x 1.8 in (483 x 134 x 46 mm)



Foot-C 2

Foot-C 2 is a full-featured compact DMX foot controller with up to 36 channels of control. Create and control a full light show of chases, scenes, fades, and more with just the tap of a foot! Easily change from scene to scene using the up and down pedals and achieve instant blackout with the press of a pedal. Foot-C 2 has guitar pedal-style buttons and a bright and easy-to-read LED display that shows modes, functions, and values to provide convenient and durable access to light shows. Foot-C 2 has included MIDI input for a perfectly timed show and direct audio line input triggers scenes with amazing accuracy. Foot-C 2 is designed to work with fixtures that have up to six channels.

- DMX Channels: 36
- Input Voltage: 12 VDC, 1 A (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 4.2 lb (1.9 kg)
- Size: 7.2 x 14.2 x 2.6 in (183 x 360 x 66 mm)



Data Stream 8

Data Stream 8 is a flexible DMX splitter designed to distribute and boost incoming DMX signals from dual inputs into 8 separate outputs via a master 3-position switch. Each input can be used simultaneously and sent to any output. Individual 2-position switches can also send data from either the A or B input separately. Each of the outputs is optically isolated from the others providing protection in the event of a short. A threaded insert allows the unit to be safely secured to trussing.

- DMX Connectors: 3-pin XLR
- Rackmount: 1U
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.6 lbs (2.1 kg)



PRO-D6

PRO-D6 is a 6-channel dimmer/relay pack providing DMX control for on/off or dimming to units not equipped with DMX on their own. Each of the six sets of outlets (duplex) can be set to any DMX address and independently set as a dimmer or relay. Twelve user-selectable chase patterns make programming a breeze.

- DMX Channels: 6
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 9.3 lb (4.2 kg)
- Size: 18 x 5.8 x 3.8 in (457 x 147 x 97 mm)









39 lb (18 kg)

CH-06 Tripod

• Stand Height: 9 ft (2.7 m) fully extended

Load Capacity: 50 lb (22 kg)

Weight: 11 lb (5 kg)







CLP-25N



CLP-05

Load Capacity:

168 lb (76 kg)



Clamps See also Trusst clamps (p. 70)

Portable Stands





CLP-35HC



CLP-06

Load Capacity:

224 lb (102 kg)

CH-31 Truss w/T-bar

Weight: 60 lb (27 kg)

Bar Diameters: 1.5 in (38 mm)

Load Capacity: 200 lb (90 kg)

Stand Height: 9 ft (2.7 m) fully extended



NEUTRIK®

powerCON_®

Load Capacity: 2.9 lb (1.3 kg)

CLP-10

Load Capacity:

52 lb (24 kg)

Cables See also Outdoor Cables (p. 17)



3-Pin DMX Cable

Available Lengths: 5 ft (1.5 m) 10 ft (3 m) 25 ft (7.6 m) 50 ft (15 m)

CH-03 Tripod

Stand Height: 7 to 12 ft (2.1 to 3.7 m)

Bar Diameters: 1.5 in (38 mm)

Load Capacity: 110 lb (50 kg)

Weight: 24 lb (10.8 kg)

Load Capacity

60 lb (27 kg)

CLP-15

Load Capacity:

660 lb (295 kg)



Load Capacity: 68 lb (30 kg)



DMX3F5M 3-pin (F) to 5-pin (M) DMX converter

Length: 6 in (154 mm)

PLIEC LINKING CABLE

Available Lengths:

5 ft (1.5 m)

25 ft (7.6 m)

Nale-to-female IEC extension cable



Length: 6 in (154 mm)

Standard power cable

with an IEC connector

Length: 8 ft (2.4 m)

(Also available in white)

DMX5F3M



5-pin (F) to 3-pin (M)



NEUTRIK®

18 in (45.7 cm) 5 ft (1.5 m) 10 ft (3 m) 25 ft (7.6 m)

etherCON® Available Lengths: 50 ft (15 m) 100 ft (30.4 m)







VIP Gear Bag CHS-40

Abyss USB COLORpalette Core 3x3 Derby X EZwedge Tri Gobo Zoom USB Rotosphere Q3 Intimidator Scan 305 IRC Kinta FX LX5 Mini Kinta Mini Strobe LED SlimBEAM Quad SlimPANEL Tri-24 IP



VIP Gear Bag CHS-BPK Multipurpose backpack

Swarm 4 FX

Swarm 5 FX

Wash FX 2

Wedae Tri

And More!

Swarm Wash FX



VIP Gear Bag CHS-360

Intimidator Spot 360

VIP Gear Bag CHS-2XX

Intimidator Spot 255

Intimidator Spot 260

NEW

NEW



VIP Gear Bag CHS-FR4

Freedom Par Hex-4 Freedom Par Tri-6

Freedom Par Quad-4 Freedom Par Quad-4 IP



VIP Gear Bag CHS-SP4

EZpar 56 SlimPAR 38 SlimPAR 56 And More!



VIP Gear Bag CHS-25

Fits EZpar 56 EZpar 64 RGBA Shocker 90 Shocker Panel 180 USB SlimPAR 38 SlimPAR 64 SlimPAR 64 RGBA And More!

VIP Gear Bag CHS-30 Fits

COREpar 80 USB COREpar 40 USB SlimPAR Pro H USB SlimPAR Pro Q USB SlimPAR Pro W USB SlimPAR H6 USB SlimPAR QUV 12 USB SlimPAR Q6 USB SlimPAR Q12 USB SlimPAR T6 USB SlimPAR T12 USB COREpar UV USB And More!



Intimidator Beam 355 Intimidator Spot 355 Intimidator Spot 375Z Intimidator Trio Intimidator Wash Zoom 450 And More!


VIP Gear Bag CHS-60

COLORband H9 USB

COLORband PiX USB COLORband PiX-M USB COLORband PiX IP COLORband T3 USB COLORrail COLORstrip COLORstrip Mini And More!

TRUESTO

TRUSST offers trussing, clamps, and presentation solutions that add elegance and impact to events and productions while ensuring the highest standards of safety and value. TRUSST trussing systems give you the tools to enhance events and live performances with ease of setup, maximum flexibility, maximum safety and maximum impact. TRUSST offers straight and curved sections, corners, base plates, clamps, and accessories of varied dimensions and configurations to suit most design demands. Our truss sections are made from sturdy 6082-T6 alloy aluminum by certified SLV welders. All sections are inspected and certified to meet stringent TUV safety standards; they work seamlessly with other truss brands that utilize the same standard conical connectors. When speed and convenience are priorities, our portable Goal Post and Arch Kits give you the ability to build your set just about anywhere and quickly. Add even more visual impact and excitement to your show with collapsible and portable Glo Totem kits, and a collection of scrims that add durability and elegance to your truss and stands.

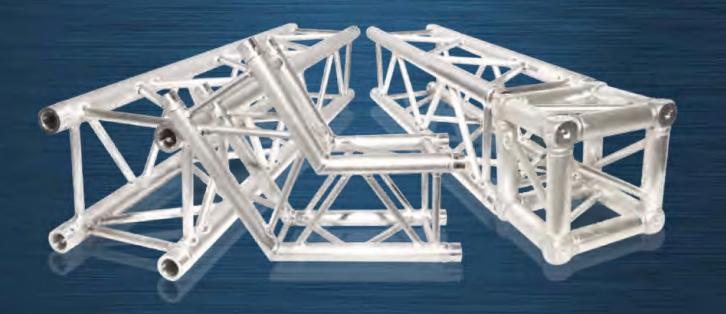

67



STRAIGHT SECTIONS

.25 m (0.82 ft) section

CT290-402S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 8 lb (3.7 kg)

.5 m (1.64 ft) section

CT290-405S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 11 lb (5 kg)

.75 m (2.46 ft) section

CT290-407S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 13.9 lb (6.3 kg)

1 m (3.28 ft) section

CT290-410S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 15.87 lb (7.2 kg)

TW Ges

1.5 m (4.92 ft) section

CT290-415S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 21.16 lb (9.6 kg)

2 m (6.56 ft) section

CT290-420S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 26.45 lb (12 kg)

2.5 m (8.2 ft) section

CT290-425S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 33 lb (15 kg)


3 m (9.84 ft) section

CT290-430S

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 38.58 lb (17.5 kg)



Strong, Easy, Reliable.







ARC SECTIONS

3 m arc section CT290-430CIR-90

- Weight: 28.6 lb (13 kg)
- Outside diameter: 9.84 ft (3 m)
- Inside diameter: 8.20 ft (2.5 m)
- Arc: 90°



2 m arc section CT290-420CIR-90

- Weight: 21.6 lb (9.8 kg)
- Outside diameter: 6.56 ft (2 m)
- Inside diameter: 4.92 ft (1.5 m)
- Arc: 90°



1.5 m arc section CT290-415CIR-180

- Weight: 21.6 lb (9.8 kg)
- Outside diameter: 4.92 ft (1.5 m)
- Inside diameter: 3.28 ft (1 m)
- Arc: 180°





CORNERS



6-Way Corner CT290-6WAYC

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 18.30 lb (8.3 kg)



2-Way 120° Corner CT290-4120C

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 12.12 lb (5.5 kg)



3-Way 90° Corner CT290-4390C

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 16.53 lb (7.5 kg)



3-Way "T" Junction CT290-43TC

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 14.33 lb (6.5 kg)



2-Way 90° Corner CT290-490C

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 12.1 lb (5.5 kg)



2-Way 135° Corner CT290-4135C

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 13.93 lb (6.3 kg)



Versa Hinge CT290-4VH

- Size: 11.42 x 11.42 in (290 x 290 mm)
- Weight: 18.6 lb (8.5 kg)

6-Way Block Connector CT-CONKIT6WAY

30 in Base Plate

105 mm Spacer

CT290-4105SK

1 m Pipe

CT-40110P

Size: 30 x 30 in (762 x 762 mm)

Weight: 31.70 lb (14.4 kg)

CT290-4130B





Speaker Stand Adapter CT-CONSPK



16 in Base Plate CT290-4116B

- Size: 16 x 16 in (406 x 406 mm)
- Weight: 9.0 ls (4.1 kg)



12 in Base Plate CT290-4112B

- Size: 12 x 12in (144 x 144mm)
- Weight: 7.5 lb (3.4 kg)

ACCESSORIES

BASE PLATES



24 in Base Plate

• Size: 24 x 24 in (610 x 610 mm)

Weight: 21.1 lb (9.6 kg)

CT290-4124B

Conical Connector Set CT-CONKIT



Base Plate Connector Set CT-CONKITB






210 mm Spacer CT290-4210SK



Connector Pins CT-PIN12



Dolly Kit CT290-DOLLYKIT



The TRUSST CT290-DOLLYKIT is an all-in-one kit that includes 2 truss dollies, ten truss spacers, and 2 ratchet straps. This lightweight and durable dolly kit easily holds straight truss for damage-free transport or storage. Features include 360° wrap around style clamps, plastic coated saddles to protect against scratches and large, heavy duty rubber coated ball bearing wheels. It safely handles TRUSST CT290 straight sections of any length and any other 290 mm square truss sections.

VIDEO MOUNT



Universal TV Truss Mount

CT-UTVM

- Size: 27.2 x 0.6 x 8.6 in (690 x 15 x 219 mm)
- Weight: 6 lb (2.8 kg)
- Load Capacity: 200 lb (90.7 kg)
- Mounts 26" to 50" flat panel TVs
- Includes connecting hardware and 2 narrow clamps for 50 mm tubes



Adjustable Panel Point

CT-APP 2

- Load capacity: 1,100 lb. (500 kg)
- Fits: 2 inch (50 mm) truss up to 20.5" x 20.5"
- Weight: 9.2 lb. (4.2 kg)
- Dimensions: 25.5 x 1.9 x 5.9 in (650 x 50 x 150 mm)
- · Color: Black anodized



CLAMPS



Swivel Coupler Lockable CTC-50SCL

Load Capacity:

1,650 lb (750 kg)



Narrow Half-Coupler CTC-50HCN

Load Capacity: 1,650 lb (750 kg)



35 mm Truss Clamp CLP-35HC

Load Capacity: 165 lb (75 kg) Fits: Goal Post Kit & Arch Kits



Scrim Clamp CTC-35SCX2

Weight: 0.2 lb (0.1 kg) Fits: 1.38-1.5 in (35-38 mm) 2 clamps per package



Half-Coupler CTC-50HC

Load Capacity: 1,650 lb (750 kg)



Keder Beam Clamp CT-TENT

Load Capacity: 1,100 lb (500 kg)



Gripper Clamp CTC-50G

Load Capacity: 550 lb (250 kg)


STANDS

Crank Tower

CT-CS60

The TRUSST Crank Tower CT-CS60 is a crank up tower stand with a maximum height of 6 meters (19.7') and the ability to lift and support up to 250 kg (550 lb). Constructed almost entirely of metal, there are no plastic parts to break or strip. As versatile as it is dependable, the crank tower can be easily adjusted to fit multiple sizes of truss. Other features include rubber-coated feet and polyurethane wheels that protect flooring surfaces from scratches.

- Weight: 242 lb (110 kg)
- Load Capacity: 550 lb (250 kg)
- Max Height: 19.7 ft (6 m)
- Base Footprint: 7.5 x 7.5 ft (2.2 x 2.2 m)

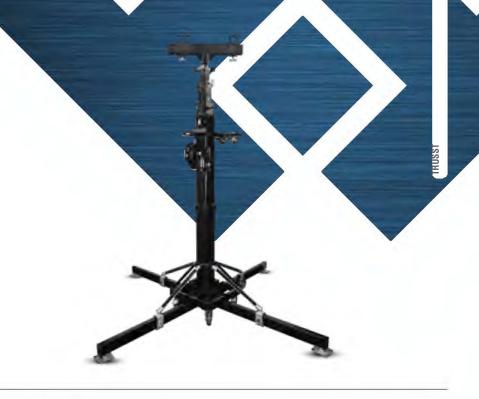

Crank Stand

CT-CS30

The TRUSST Crank Stand CT-CS30 is a lightweight tripod stand with a sturdy all metal construction, geared towards production companies and mobile entertainers. It uses an internal cable winch to support and raise truss, speakers, and lights with ease. The tension knob and safety pin prevent the mast load from coming down uncontrollably in case of cable failure. The crank winch has a built-in brake and a folding handle for safety and ease of use. The M12 threaded top hole accepts a TRUSST CTC-50HC clamp to easily support lighting bars. An included adjustable T-bar adaptor fits multiple truss sizes. A 35 mm top mast allows for direct attachment of a speaker cabinet-no adaptor needed. Hard rubber feet help protect flooring surfaces from scratches. Comes fully assembled.

- Weight: 33 lb (15 kg)
- Load Capacity: 132 lb (60 kg)
- Tube diameter: 35mm (1.4in)
- Height: 5.64 to 9.84 ft (1.72 to 3 m)

CHS-TR3 Gear Bag

The TRUSST CHS-TR3 bag is designed to carry a tripod or crank stand. It allows you to protect your investment with a strong ballistic nylon exterior and interior padding. It easily transports your gear using 2 conveniently placed handles. It has an exterior zipper pouch that fits accessories or a T-Bar adaptor.

- Size: 66 x 9 x 9 in (1,680 x 230 x 230 mm)
- Compatible products: CT-CS30, CH-02, or CH-06
- Compartments: 2
- Weight: 0.7 lb (0.3 kg)





CHS-TR3 carry bag sold separately






KITS

Goal Post Kit

The TRUSST Goal Post Kit provides the perfect location to mount lights and hang backdrops such as the popular MotionDrape LED, for a professional presentation. It assembles in minutes using numbered sections. For added value and versatility, the lightweight aluminum truss can be assembled at 2 different heights. To simplify transportation, use the optional, custom-designed TRUSST CHS-Goal bag to carry the entire kit on the road.

- Size (assembled): 11.2 x 3.8 x 7.7 ft (3.4 x 1.1 x 2.3 m)
- Weight: 98 lb (44.4 kg)

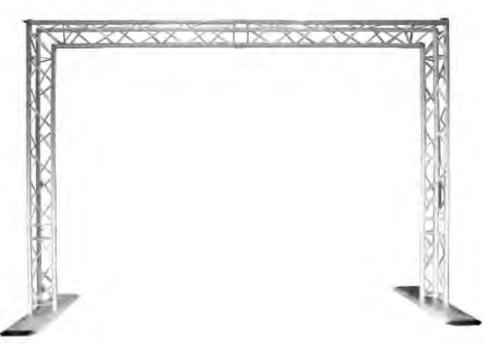





GLO TOTEMS

TRUSST Glo Totems are all-in-one collapsible and portable Totem kits that make it easier than ever to add an extra dimension of elegance and excitement to your show. Available in 3 sizes (1.5 m, 2 m, and 2.5 m), each system includes 4 tubes, top and bottom plates, fire retardant scrim, carry bag for tubes, and all connecting hardware. Made of lightweight aluminum for easy transportation, setup, and breakdown, they assemble with the same conical connection system as other TRUSST products. Stress-free assembly with no screws or tools, additional mounting holes for lighting fixtures, and convenient integrated carrying handles in the bases make these a perfect addition to your rig.

2 m Glo Totem

- Size (Top Plate): 11.8 in x 11.8 in (300 x 300 mm)
- Weight: 39.2 lb (17.8 kg)
- Length: 6.56 ft (2 m)
- Size (Base Plate): 23.6 x 23.6 in (600 x 600 mm)



1.5 m Glo Totem

- Size (Base Plate): 23.6 in x 23.6 in (600 x 600 mm)
- Weight: 34.3 lb (15.6 kg)
- Length: 4.92 ft (1.5 m)
- Size (Top Plate): 11.8 x 11.8 in (300 x 300 mm)

QUICK TRUSS HARDWARE

QT-Conical

TRUSST QT-CONICAL replaces lost or misplaced conical connectors used to assemble the TRUSST QT-GOAL Kit.

- Weight: 1 lb (0.45 kg)
- 4 conical connectors

OT-Pin1

TRUSST QT-PIN12 replaces lost or misplaced spigots and cotter pins used to assemble the TRUSST QT-GOAL Kit and QT-ARCH Kit.

- Weight: 1 lb (0.45 kg)
- 12 Spigots
- 12 Cotter Pins



OT-Sr

TRUSST QT-SNAP replaces lost or misplaced snap pins used to assemble the TRUSST QT-GOAL Kit and QT-ARCH Kit.

- Weight: 1 lb (0.45 kg)
- 6 Snap Pins



CT-CONSPK

This TRUSST Totem speaker adaptor allows you to mount a speaker securely and safely on top of a truss Totem. The speaker stand adaptor eliminates the need for ratchet straps or zip-ties to secure the speaker, for a clean, professional look. Made of solid aluminum with a M10 threaded hole in the base, it includes an M10 bolt and washer for attachment to the Totem top plate. The adaptor is 1 3/8 in (35mm) in diameter and 3 in (75mm) long and accommodates most standard speaker stand mounts.















Scrim Clamp

CTC-35SCX2

The Scrim Clamp allows you to attach the top of a tripod scrim securely and safely to the upright pole of any tripod stand. The Scrim Clamp eliminates the need for zip-ties or other less than optimum attachment methods for a clean, secure, professional look.

For complete specifications, (See page 70).





LOAD RATING CHARTS

CT290 truss sections are manufactured using 50 mm (1.97") diameter x 2 mm (.08") wall main tube and 20 mm (.79") x 2 mm (.08") wall diagonal tube, 6082-T6 aluminum alloy. The box truss is 290 mm x 290 mm (11.42" x 11.42") square.

IMPERIAL


| Span (feet) | 3.28 | 6.56 | 9.84 | 13.12 | 16.40 | 19.69 | 22.97 | 26.25 | 29.53 | 32.81 | 36.09 | 39.37 | 42.65 | 45.93 | 49.21 | 52.49 |
|---------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Center load (Is) | 6103.3 | 4567.8 | 3037.7 | 2270.8 | 1808.7 | 1499.1 | 1276.7 | 1108.9 | 977.3 | 871.3 | 783.5 | 709.9 | 646.8 | 592.2 | 544.1 | 501.6 |
| Deflection (inches) | 0.04 | 0.12 | 0.28 | 0.51 | 0.83 | 1.18 | 1.61 | 2.09 | 2.64 | 3.27 | 3.94 | 4.69 | 5.51 | 6.38 | 7.32 | 8.35 |
| Uniform load (ls) | 6103.3 | 6094.5 | 6075.5 | 4541.5 | 3616.7 | 2998.7 | 2554.1 | 2217.0 | 1954.4 | 1741.7 | 1566.6 | 1420.7 | 1292.6 | 1185.2 | 1088.0 | 1001.8 |
| Deflection (inches) | 0.04 | 0.16 | 0.35 | 0.67 | 1.02 | 1.46 | 2.01 | 2.60 | 3.31 | 4.06 | 4.92 | 5.87 | 6.89 | 7.99 | 9.17 | 10.43 |

Loading figures only valid for static loads and spans with two supporting points. If dynamic loads or wind loads are involved, or more supporting points are applied, contact a structural engineer.

METRIC

| Span (m) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|-------------------|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| Center load (kg) | 2768.4 | 2071.9 | 1377.9 | 1030.0 | 820.4 | 680.0 | 579.1 | 503.0 | 443.3 | 395.2 | 355.4 | 322.0 | 293.4 | 268.6 | 246.8 | 227.5 |
| Deflection (mm) | 1 | 3 | 7 | 13 | 21 | 30 | 41 | 53 | 67 | 83 | 100 | 119 | 140 | 162 | 186 | 212 |
| Uniform load (kg) | 2768.4 | 2764.4 | 2755.8 | 2060.0 | 1640.5 | 1360.2 | 1158.5 | 1005.6 | 886.5 | 790.0 | 710.6 | 644.4 | 586.3 | 537.6 | 493.5 | 454.4 |
| Deflection (mm) | 1 | 4 | 9 | 17 | 26 | 37 | 51 | 66 | 84 | 103 | 125 | 149 | 175 | 203 | 233 | 26.5 |

For complete specifications, visit TRUSST.com | Specifications subject to change without notice.

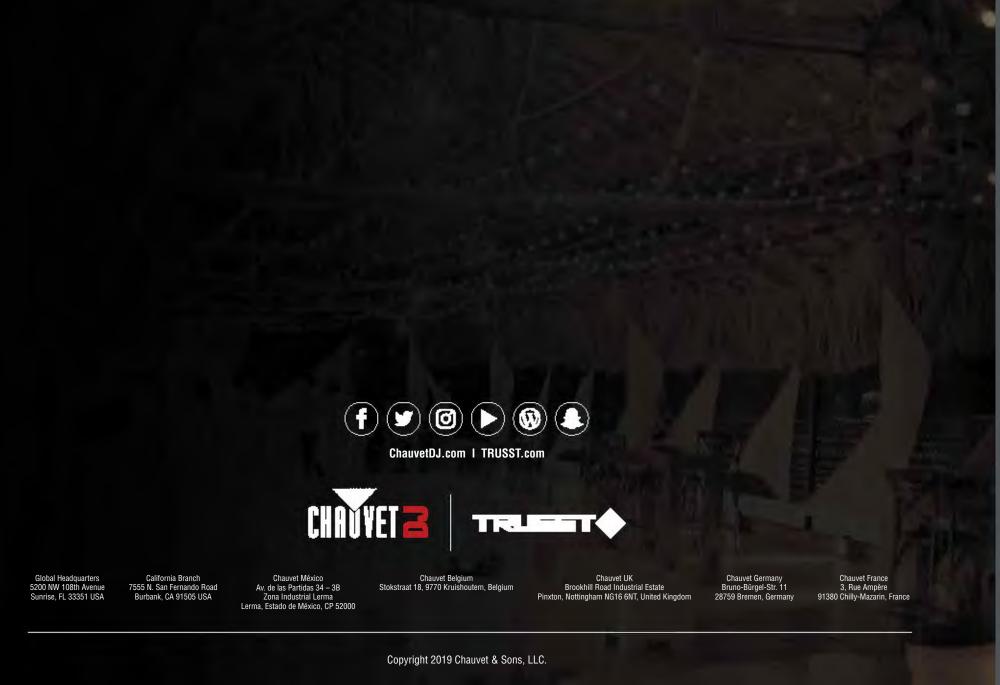

"The CHAUVET name and logo and the other brands and trademarks in this catalog, including, but not limited to, CHAUVET DJ, VIVID, INTIMIDATOR, FREEDOM, EVE, SLIMPAR, SLIMPANEL, COLORBAND, COREPAR, BTAIR, EZLINK, D-FI, D-FI USB, GIGBAR, HURRICANE, GEYSER, NIMBUS, CUMULUS, FUNFETTI, SCORPION, SWARM, ROTOSPHERE, LINE DANCER, KINTA, ABYSS, JAM PACK, FLARECON, OBEY, FOOT-C and TRUSST are registered trademarks or trademarks owned by CHAUVET in the U.S. and other countries and may not be used by a third party for any purpose without the prior written consent of CHAUVET."

For complete specifications, visit ChauvetDJ.com | All products meet CSA and CE standards. Specifications subject to change without notice.



