

SoLED w840

Powerful LED Strobes with the look and feel of xenon!





- Half the size and one-fourth the power consumption of conventional strobes.
 Weighs less than 5 lbs!
- Uses same control modes and fixture personalities as other popular strobes
- No lamp replacement
- DMX512 control with RDM
- 2400Hz flicker free modes included









Worldwide Exclusive Distribution

sales@tmb.com

Los Angeles +1 818.899.8818 London +44 (0)20.8574.9700



New York +1 201.896.8600 Beijing +86 10.8492.1587 Toronto +1 519.538.0888





SoLED w840

| Specifications | |
|-----------------------------|--|
| Light Sources | 84 CREE® LEDs |
| Colour | White |
| Colour Temperature | >5700K |
| Control | DMX 512A, RDM |
| Cooling | Convection |
| Operating Temperature | -20 °C - +40 °C |
| DMX Channels | 1, 3, 4 |
| DMX Connectors | XLR 5-Pin M/F In/Out |
| Mains Power | 100-240 VAC Universal Input, 50/60 Hz |
| Peak Output Power | 840 W |
| Max. Power Consumption | 420 W |
| Power Connectors | PowerCon 20 A In |
| IP Rating | IP20 |
| Unit Dimensions (LxWxH) | 13.5 x 4.1x 3.4 in [342 x 103.9 x 86.5 mm] |
| Shipping Dimensions (LxWxH) | 17 x 8 x 9 in [432 x 203 x 229 mm] |
| Unit Weight | 5.95 lb [2.7 kg] |
| Shipping weight | 8 lb [3.63 kg] |

| Ordering Codes | |
|----------------|---------------|
| Ordering Code | Item |
| SOLSLDW840 | SoLED fixture |
| SOLSLDSTAND | SoLED Stand |

Specifications and features are subject to change without notice.

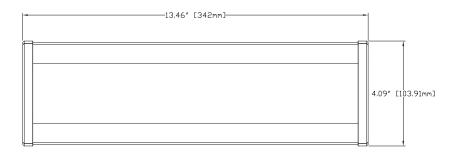

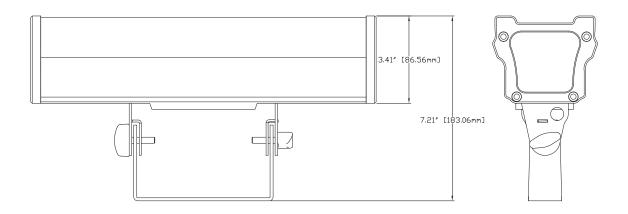

sales@tmb.com

Los Angeles +1 818.899.8818 London +44 (0)20.8574.9700



New York +1 201.896.8600 Beijing +86 10.8492.1587 Toronto +1 519.538.0888